

LAW OFFICES  
**SUGHRUE, MION, ZINN, MACPEAK & SEAS, PLLC**

2100 PENNSYLVANIA AVENUE, N.W.  
WASHINGTON, D.C. 20037-3202  
TELEPHONE (202) 293-7060  
FACSIMILE (202) 293-7860

June 22, 1998

**JAPAN OFFICE**

TOEI NISHI SHIMBASHI BLDG. 4F  
13-5 NISHI SHIMBASHI 1-CHOME  
MINATO-KU, TOKYO 105, JAPAN  
TELEPHONE (03) 3503-3760  
FACSIMILE (03) 3503-3756

**BOX PATENT APPLICATION**

Assistant Commissioner for Patents  
Washington, D.C. 20231

Re: Application of Kazuyoshi YOSHIMI, Isao YONEDA and Naoki SUETSUGU  
"ELECTRIC VACUUM CLEANER"  
Our Ref: Q50749

Dear Sir:

Attached hereto is the application identified above including the specification and claims, 20 sheets of formal drawings, an executed Assignment and PTO-1595 form, and executed Declaration and Power of Attorney.

The Government filing fee is calculated as follows:

Total claims	<u>13</u>	- 20	=	<u>      </u>	x	\$22 =
Independent claims	<u>5</u>	- 3	=	<u>2</u>	x	\$82 = \$ 164.00
Base Fee						\$ 790.00
Multiple Dependent Claim Fee (\$270.00)						
<b>TOTAL FILING FEE</b>						<b>\$ 954.00</b>
Recordation of Assignment						\$ 40.00
<b>TOTAL FEE</b>						<b>\$ 994.00</b>

Checks for the statutory filing fee of \$954.00 and Assignment recordation fee of \$40.00 are attached. You are also directed and authorized to charge or credit any difference or overpayment to Deposit Account No. 19-4880. The Commissioner is hereby authorized to charge any fees under 37 C.F.R. §§ 1.16 and 1.17 and any petitions for extension of time under 37 C.F.R. § 1.136 which may be required during the entire pendency of the application to Deposit Account No. 19-4880. A duplicate copy of this transmittal letter is attached.

Priority is claimed from June 23, 1997 based on Japanese Patent Application No. 166242/97. A certified copy of the priority document is enclosed herewith.

Respectfully submitted,

SUGHRUE, MION, ZINN,  
MACPEAK & SEAS, PLLC  
Attorneys for Applicant

By: *Frank Osha*  
Frank Osha  
Reg. No. 24,625

## S P E C I F I C A T I O N

BE IT KNOWN THAT WE, KAZUYOSHI YOSHIMI, ISAO YONEDA and NAOKI SUETSUGU residing at 276-2, Uegaki, Ichijima-cho, Hikami-gun, Hyogo-ken, Japan, 1150-21, Hoshiro, Himeji-shi, Hyogo-ken, Japan and 624, Furusaka, Hojo-cho, Kasai-shi, Hyogo-ken, Japan, respectively, subjects of Japan, have invented certain new and useful improvements in

### ELECTRIC VACUUM CLEANER

of which the following is a specification:-

## ELECTRIC VACUUM CLEANER

### BACKGROUND OF THE INVENTION

The present invention relates to an electric vacuum cleaner.

An electric vacuum cleaner which is transformable depending on places to be cleaned is disclosed in Japanese Unexamined Utility Model Publication No. 80455/1992, wherein the electric vacuum cleaner is of concurrent type which can be used in an upright condition for use by fastening a vacuum cleaner body to a support pipe in a attachable/detachable manner and which can also be used in a condition where the vacuum cleaner body is detached from the support pipe.

Such a conventional concurrent type vacuum cleaner comprises, as shown in Fig. 21, a vacuum cleaner body 31, a hose 40, a support pipe 32, a rotary bend 33 and a suction device 34. By sequentially connecting these components, there is achieved a condition where the vacuum cleaner body is detached from the support pipe wherein the vacuum cleaner body 31 and the support pipe 32 are separated.

The rotary bend 33 is connected to the suction device 34 (or a rotary pipe (not shown) connected to this suction device 34) in a rotatable manner.

Further, by fitting projections 36 provided on the outer surface of the support pipe 32 to concave portions 35 formed on the lower surface of the vacuum cleaner body 31, the lower surface of the vacuum cleaner body 31 can be fastened to the support pipe 32, whereby the vacuum cleaner can be transformed into an upright condition for use as shown in Fig. 21. When assuming the upright condition for use, the vacuum cleaner body 31 is leaning against the support pipe 32 and abuts onto the suction device 34. In the upright condition for use, the hose 40 is so arranged that the upper end thereof is connected to a position substantially below a grip 37 in the rear side of the support pipe 32, an intermediate

portion thereof is winding from the side of the support pipe 32, and the lower end thereof is connected to the vacuum cleaner body 31 in the front side of the support pipe 32. It should be noted that 31a denotes a portion at  
5 which rear wheels 38 at a rear portion of the lower end of the vacuum cleaner body 31 are provided.

There are formed at least two concave portions 35 on the lower surface of the vacuum cleaner body 31 along a front and rear direction of the vacuum cleaner  
10 body 31, and a plurality of projections 36 are provided along a vertical direction of the support pipe 32 so as to correspond to the respective concave portions 35.

However, according to this conventional art, the front and rear wheels of the suction device and the rear  
15 wheels of the vacuum cleaner body contact the ground in the upright condition for use. Since six wheels simultaneously contact the ground in this arrangement, change in running directions when performing cleaning operation is hard to be made, whereby the cleaning  
20 workability is made poor. It is further presented a drawback, in a condition where the vacuum cleaner body is detached from the support pipe, that the rear wheels of the vacuum cleaner body largely project rearward and look unattractive.

25 A conventional vacuum cleaner is also arranged in such a manner that the rotary bend 33 can be rotated with respect to the suction device 34 in the upright condition for use. In addition, the center of gravity of the vacuum cleaner body 31 attached to the upper surface  
30 of the support pipe 32 is located above a rotating axis (that is, a position corresponding to a central axis of a connecting portion 39 of the rotary bend 33 and suction device 34).

Therefore, when the support pipe 32 and rotary  
35 bend 33 are slightly inclined to a vertical direction in Fig. 21 as to rotate with respect to the suction device 34, continuous force in a rotating direction is applied to an users hand holding the grip 37 in the upper portion of

the support pipe 32 and is thus quite unstable which also leads to poor workability.

On the other hand, while this problem can be solved by an arrangement in which the rotary bend 33 is preliminarily fastened to the suction device 34 so that it cannot rotate, such an arrangement would limit the sphere of usage and be undesirable, since, for instance, the suction device 34 can no longer be inserted into narrow spaces such as under a bed in which the rotary bend 33 is in a condition where it is rotated as far as to be parallel to the floor surface with the vacuum cleaner body being detached from the support pipe.

The conventional electric vacuum cleaner of Fig. 21 also presents a drawback that it is difficult to fix the vacuum cleaner to the support pipe since the plurality of projections 36 aligned in the upper and lower ends of the vacuum cleaner body need to be simultaneously fitted to the concave portions 35.

Further, during the detaching process, the vacuum cleaner body 31 might lose its stability in a case where only the projection 36 on the lower side is fitted to the concave portion 35, since the front side of the vacuum cleaner body 31 would then not be fixed to the support pipe 32.

A conventional vacuum cleaner in its upright condition for use is so arranged that a portion in the proximity of the upper end of the hose 40 projects from below the grip 37 to rearward the support pipe 32. This arrangement presents a drawback that the vacuum cleaner body is hard to use since this portion contacts the user of the hose 40 in a rubbing manner.

The present invention has been made in view of solving these problems, and it is an object of the present invention to provide an electric vacuum cleaner having improved cleaning workability and a vacuum cleaner body of improved external appearance when it is detached from the support pipe.

It is further an object of the present invention

to provide an electric vacuum cleaner which can be easily operated in an upright condition for use by preventing the rotary bend which receives the load of the vacuum cleaner body from rotating relative to the rotary pipe at a side  
5 of the suction device, and moreover, of which sphere of usage is not limited by permitting rotation in a condition where the vacuum cleaner body is detached from the support pipe.

It is also an object of the present invention to  
10 provide an electric vacuum cleaner of which vacuum cleaner body can be easily attached to/detached from the support pipe.

It is another object of the present invention to provide an electric vacuum cleaner in which the stableness  
15 of the vacuum cleaner body during the attaching/detaching process is improved.

It is still another object of the present invention to provide an electric vacuum cleaner in which the hose in the upright condition for use can be smoothly  
20 operated without contacting the user.

#### SUMMARY OF THE INVENTION

In accordance with the present invention, there is provided an electric vacuum cleaner comprising a vacuum  
25 cleaner body, a hose to be connected to the vacuum cleaner body, a support pipe to be connected to the hose, and a suction device to be connected to the support pipe, wherein the suction device is provided with running wheels, and the vacuum cleaner body is able to be  
30 detachably fastened to the support pipe, and is made to run by the wheels of the suction device in a condition where the vacuum cleaner body is attached to the support pipe.

In accordance with the present invention, there  
35 is further provided an electric vacuum cleaner comprising a vacuum cleaner body, a hose to be connected to the vacuum cleaner body, a support pipe to be connected to the hose, a rotary pipe to be connected to the support pipe in

a rotatable manner, and a suction device to be connected to the rotary pipe,

wherein the vacuum cleaner body is arranged such that the vacuum cleaner body can be fastened to the support pipe  
5 in a detachable manner and wherein the electric vacuum cleaner is provided with a rotation regulating means for preventing rotation of the rotary pipe with respect to the support pipe when the vacuum cleaner body is attached to the support pipe.

10 In accordance with the present invention, there is also provided an electric vacuum cleaner of the present invention comprising:

- (a) a vacuum cleaner body,
- (b) a support pipe connected to a suction inlet of  
15 the vacuum cleaner body,
- (c) a rotary bend connected to the support pipe,
- (d) a rotary pipe connected to the rotary bend in a rotatable manner, and
- (e) a suction device connected to the rotary pipe,

20 wherein the vacuum cleaner body is attached to the support pipe in an attachable/detachable manner, and wherein the electric vacuum cleaner further includes a rotation locking means for locking rotation of the rotary bend with respect to the rotary pipe when the vacuum  
25 cleaner body is attached to the rotary pipe at a specified position.

The rotation locking means preferably comprises a flat portion formed on the vacuum cleaner body, a flat portion formed on the rotary bend, and a flat portion  
30 formed on the rotary pipe.

It is preferable that at least a part of the flat portion of the rotary bend and the flat portion of the rotary pipe is so formed as to project from a circumferential surface of the rotary bend or rotary pipe  
35 along a tangential direction of the circumferential surface.

The rotation locking means preferably comprises projections formed on the rotary bend and the rotary pipe,

and concave portions formed on the vacuum cleaner body for fitting with the projections.

In accordance with the present invention, there is still further provided an electric vacuum cleaner  
5 comprising a vacuum cleaner body, a hose to be connected to the vacuum cleaner body, a support pipe to be connected to the hose, and a suction device to be connected to the support pipe,

wherein the support pipe is provided with a  
10 first engaging portion which detachably engages with a first receiving portion formed in a rear portion of the vacuum cleaner body, and a second engaging portion which detachably engages with a second receiving portion formed in a front portion of the vacuum cleaner body.

15 The second engaging portion of the support pipe is preferably movable up and down.

It is preferable that a tip portion of the second engaging portion of the support pipe is formed with a slanting surface that is inclined in an upward direction  
20 with receding from the support pipe.

It is preferable that the electric vacuum cleaner includes an energizing means that energizes the second engaging portion of the support pipe in a downward direction.

25 In accordance with the present invention, there is yet further provided an electric vacuum cleaner comprising a vacuum cleaner body, a hose to be connected to the vacuum cleaner body, a support pipe to be connected to the hose, and a suction device to be connected to the support pipe,  
30

wherein the vacuum cleaner body is detachably fastened to a front of the support pipe, and wherein the hose is connected to the vacuum cleaner body and the hose in the front of the support pipe.

35 It is preferable that at least a part of an upper portion of the support pipe is bent to the front side of the support pipe, and an opening is formed at the upper end of the bent portion of the support pipe.



It is preferable that a grip is fastened to a rear side of the bent portion of the support pipe.

Since the electric vacuum cleaner of the present invention is provided with running wheels at its suction  
5 device and the vacuum cleaner body is made to run by the wheels of the suction device in a condition where the vacuum cleaner body is attached to the support pipe, the cleaning workability is favorable.

Since the electric vacuum cleaner of the present  
10 invention includes a rotation locking means for locking rotation of the rotary bend with respect to the rotary pipe, the rotation locking means locks the rotation between the rotary pipe and rotary bend by making the vacuum cleaner body abut against the rotary pipe at a  
15 specified position when transforming to the upright condition for use. Therefore, the support pipe and the rotary bend cannot be inclined as to rotate with respect to the suction device. Accordingly, no force in a rotating direction is applied to an users hand holding the  
20 grip at the upper portion of the support pipe.

When transforming to the condition where the vacuum cleaner body is detached from the support pipe, rotation locking condition between the rotary pipe and the rotary bend can be released by simply separating the  
25 vacuum cleaner body from the rotary pipe at the specified position. Therefore, the rotary bend can be rotated so as to be parallel with respect to the floor surface so that the suction device is inserted into a narrow space such as under a bed in a condition where the vacuum cleaner body  
30 is detached from the support pipe.

The electric vacuum cleaner of the present invention is so arranged that concave portions are formed at end portions in the front and rear of the vacuum cleaner body, and on the other hand, convex portions are  
35 formed at the support pipe and the like corresponding to the concave portions, as to be aligned in a vertical direction, and as to be opposing to each other (i.e. downward facing convex portion being positioned above

upward facing convex portion). Moreover, the downward facing convex portion of the support pipe is movable up and down.

By these characteristics, it has been enabled in  
5 the electric vacuum cleaner of the present invention, when being transformed to the upright condition for use, that the downward facing concave portion at the rear end of the vacuum cleaner body is made to fit to the upward facing convex portion formed, for instance, at the support pipe,  
10 and thereafter, the upward facing concave portion at the front end of the vacuum cleaner body is made to fit to the downward facing convex portion of the support pipe which might, for instance, be a clamping hook. Vice versa, when detaching the vacuum cleaner body from the support  
15 pipe, the above-described processes are performed in a reverse manner. Therefore, fitting and separation of the concave portions and convex portions can be sequentially performed point by point.

When the downward facing convex portion  
20 comprising a clamping hook is pushed up for detaching the vacuum cleaner body from the support pipe, the vacuum cleaner body is likely to tumble in a direction apart from the support pipe with a position at which the concave portion at the rear end fits with the upward facing convex  
25 portion being as a fulcrum. In this case, the additional provision of the hose connecting the vacuum cleaner body and the support pipe and arrangement of a hose retainer for fixing the hose at a higher position than the downward facing convex portion of the support pipe would fix the  
30 vacuum cleaner body to the support pipe through the hose and the hose retainer, whereby tumbling of the vacuum cleaner body can be prevented.

The electric vacuum cleaner of the present invention is further so designed that the electric vacuum  
35 cleaner body and the upper end opening of the support pipe are arranged on the front side of the support pipe, and that the hose connecting the electric vacuum cleaner body and the upper end opening is arranged in the front of the

support pipe over its full length. Therefore, the electric vacuum cleaner can be easily used in the upright condition for use, since the hose will not contact the user who is in the rear side of the support pipe.

5

#### BRIEF EXPLANATIONS OF THE DRAWINGS

Fig. 1 is a perspective, explanatory view showing an electric vacuum cleaner in an upright condition for use according to one embodiment of the present invention;

10

Fig. 2 is a partially enlarged, perspective view showing the support pipe, rotary bend and rotary pipe of Fig. 1;

15

Fig. 3 is a perspective view showing a lower surface of the electric vacuum cleaner of Fig. 1 seen from behind;

20

Fig. 4 is a perspective, explanatory view showing a condition of the electric vacuum cleaner of Fig. 1 during transformation to the upright condition for use;

25

Fig. 5 is a plan, explanatory view showing a positional relationship between the rotary bend and the rotary pipe of Fig. 4;

30

Fig. 6 is a partially enlarged, front view showing a condition where the rotary bend of Fig. 4 is rotated to be parallel to a floor surface;

35

Fig. 7 is a partially enlarged sectional, explanatory view showing a connecting portion between the rotary bend and the rotary pipe of Fig. 4;

40

Fig. 8(a) is a sectional view taken along the line VIII-VIII of Fig. 7, and Fig. 8(b) is a view seen from a position indicated by arrow A in Fig. 8(a);

45

Fig. 9 is a sectional, explanatory view showing an exhaust channel in an interior of the electric vacuum cleaner body of Fig. 1;

50

Fig. 10 is a partially enlarged view of a proximity of a side portion of the electric vacuum cleaner body of Fig. 1;

55

Fig. 11 is a partially enlarged view of a

proximity of an upper portion of the electric vacuum cleaner body of Fig. 1;

Fig. 12 is an explanatory view showing a condition in which the vacuum cleaner body of Fig. 1 is  
5 used in a handy condition;

Fig. 13 is an explanatory view showing a condition in which the vacuum cleaner of Fig. 1 is used after transforming to a condition in which the vacuum cleaner body is removed from the support pipe;

10 Fig. 14 is a sectional, explanatory view along an axial direction of the support pipe showing a method of fitting between the support pipe and the rotary bend of Fig. 1;

Fig. 15 is a sectional, explanatory view along a  
15 radial direction of the support pipe showing a method of fitting between the support pipe and the rotary bend of Fig. 1, wherein (a) shows a condition after fitting and (b) a condition immediately before the fitting;

Fig. 16 is a sectional, explanatory view showing  
20 a condition immediately before the clamping hook of Fig. 4 is fitted to an upward facing concave portion;

Fig. 17 is a front view showing the electric vacuum cleaner of Fig. 1 in the upright condition for use;

Fig. 18 is a partially enlarged view showing a  
25 condition where a crevice nozzle is attached to the rear side of the support pipe of Fig. 1;

Fig. 19 is a partially enlarged, front view of the grip of Fig. 1,

Fig. 20 is a sectional view taken along the line  
30 VII-VII of Fig. 19; and

Fig. 21 is a front view of a conventional electric vacuum cleaner.

#### DETAILED DESCRIPTION

35 The electric vacuum cleaner of the present invention will now be explained in details with reference to the drawings.

The electric vacuum cleaner of the present

invention is an electric vacuum cleaner of concurrent type which can be used in an upright condition for use (see Fig. 1), in a condition where the vacuum cleaner body 1 is detached from the support pipe 2 (see Fig. 13), and in a  
5 handy condition where only the vacuum cleaner body 1 is used (see Fig. 12), by making a vacuum cleaner body 1 to be detachably fixed to a support pipe 2.

The electric vacuum cleaner shown in Figs. 1 to 8 comprises a vacuum cleaner body 1, a support pipe 2, a  
10 rotary bend 3, a rotary pipe 4, a suction device 5, and a hose 6 for connecting an upper end opening 2a of the support pipe 2 with a suction inlet 1a of the vacuum cleaner body 1. The suction device 5 is provided with running wheels W, and in the above described upright  
15 condition for use, running of the electric vacuum cleaner is enabled by these running wheels W.

A grip 7 to be held by an users hand is fastened to an upper portion of the support pipe 2.

As shown in Fig.2, an upper end opening 3a of  
20 the rotary bend 3 is connected to a lower end opening 2b of the support pipe 2. The support pipe 2 and the rotary bend 3 are connected to each other in a attachable/detachable manner as not to be rotatable by means of a C-ring 30 to be described later (see Fig. 15).

As shown in Fig. 7, an upper end opening 4a of  
25 the rotary pipe 4 is connected to a lower end opening 3b of the rotary bend 3 in a rotatable manner. The rotary bend 3 and the rotary pipe 4 are connected to each other as to be rotatable but not to be detachable by means of a  
30 locking piece 8 (see Fig. 8). More particularly, a circumferential groove 4b (see Figs. 7 and 8) is formed at a circumferential surface in an upper portion of the rotary pipe 4. On the other hand, a pair of opposing rectangular openings 3c are provided in a lower portion of  
35 the rotary bend 3. The rotary bend 3 and the rotary pipe 4 are connected to each other so as to couple the above groove 4b and the rectangular openings 3c (see Fig. 8(b)), and thereafter, the locking piece 8 is fitted to the

rectangular openings 3c in such a manner that a tongue piece 8a of the locking piece 8 is arranged in the interior of the groove 4b. With this arrangement, the rotary bend 3 and the rotary pipe 4 are connected to each other as to be rotatable but not to be detachable.

As shown in Figs. 4 and 5, the suction device 5 is connected to a lower end opening 4c of the rotary pipe 4. The suction device 5 is connected thereto so as not to be rotatable with respect to an axial direction of the rotary pipe 4. In this embodiment, a hollow rotary shaft 9 is fastened to the lower end opening 4c of the rotating pipe 4, and both ends of the rotary shaft 9 are connected to a rear portion of the suction device 5 in a rotatable manner. With this arrangement, the rotary pipe 4 is enabled to move around the rotary shaft 9 with respect to the suction device 5.

As shown in Figs. 2 to 4, a lower surface 1b of the vacuum cleaner body 1 can be fastened to the outer surface of the support pipe 2 in a detachable manner. The method of fixing according to this embodiment is as follows: a downward facing concave portion 1c (a first receiving portion) of Fig. 3 formed at a rear end of the lower surface 1b of the vacuum cleaner body 1 is fitted to an upward facing convex portion 4d (a first engaging portion) of Fig. 2 provided to the rotary pipe 4, whereby a condition of Fig. 4 is assumed. Then, by making the vacuum cleaner body 1 abut against the support pipe 2, a downward facing clamping hook 10 of Fig. 2 provided to the support pipe 2 is fitted to an upward facing concave portion 1d (a second receiving portion) of Fig. 3 formed at a front end of the lower surface 1b of the vacuum cleaner body 1. In this manner, the lower surface 1b of the vacuum cleaner body 1 can be fastened to the outer surface of the support pipe 2 as shown in Fig. 1.

As shown in Fig. 16, the clamping hook 10 comprises a releasing pinch 10a and a claw portion 10b (a second engaging portion) that are linked by a pair of linking plates 10c.

The pair of linking plates 10c are arranged to be respectively parallel to the compression coil spring 51 in a manner as to sandwich the compression coil spring 51 from vertical directions in Fig. 16. Further, an upper  
5 end of the compression coil spring 51 abuts against a spring stopper 52 fastened to the support pipe 2. The spring stopper 52 is arranged between the pair of linking plates 10c.

The clamping hook 10 can move up and down in an  
10 interior of a cover 53 fastened to the support pipe 2.

When transforming the electric vacuum cleaner according to this embodiment into the upright condition for use, the downward facing concave portion 1c at the rear end of the vacuum cleaner body 1 is first fitted to  
15 the upward facing convex portion 4d at the rotary pipe 4 as shown in Fig. 4.

Thereafter, the vacuum cleaner body 1 is rotated with a point at which the concave portion 1c and the convex portion 4d are fitted being as a fulcrum, and the  
20 upward facing concave portion 1d at the front end of the vacuum cleaner body 1 is fitted to the clamping hook 10 of the support pipe 2.

In this embodiment, a slanting surface 10d which is inclined in an upward direction with receding from  
25 the support pipe 2 is formed on the claw portion 10d of the clamping hook 10 as shown in Fig. 16. Thus, by simply rotating the vacuum cleaner body 1 to a direction in which it abuts against the support pipe 2, an end edge 1f of the concave portion 1d of the vacuum cleaner body 1 pushes the  
30 clamping hook 10 up while contacting the slanting surface 10d, and thereafter, when the entire claw portion 10b has got over the end edge 1f, it will fall into the interior of the concave portion 1d. Consequently, fitting of the concave portion 1d and the clamping hook 10 can be easily  
35 performed. It should be noted that while the present embodiment has been explained by taking an example in which a slanting surface 10d is provided, the present invention is not limited to this, and fitting of the

concave portion 1d and the clamping hook 10 can be performed also without the slanting surface 10d but by manually operating the releasing pinch 10a up and down.

Moreover, since the clamping hook 10 is energized downward by the compression coil spring 51 in this embodiment, the fitting of the concave portion 1d and the clamping hook 10 can be made even firmer. It should be noted that while the present embodiment has been explained by taking an example in which a compression coil spring 51 is employed as an example of an energizing means for energizing the clamping hook 10 downward, the present invention is not limited to this, and an elastic member such as rubber might be employed as an alternative energizing means to make the fitting of the concave portion 1d and the clamping hook 10 even firmer. It should be further noted that fitting of the concave portion 1d and the clamping hook 10 can also be performed by drop of the clamping hook 10 by its own weight, without providing an energizing means.

Next, detaching the vacuum cleaner body 1 from the support pipe 2 can be performed by carrying out the processes as described above in a reverse way, that is, the clamping hook 10 is drawn out from the concave portion 1d by sliding the releasing pinch 10a of the clamping hook 10 upward and performing detachment by the remaining processes in a reverse way. Therefore, since fitting and separation of the concave portion 1c and the convex portion 4d as well as the concave portion 1d and the clamping hook 10 can be sequentially performed point by point, attaching/detaching of the vacuum cleaner body 1 can be easily performed.

When pushing the clamping hook 10 up for detaching the vacuum cleaner body 1 from the support pipe 2, the vacuum cleaner body 1 is likely to tumble in a direction apart from the support pipe 2 with a position of the concave portion 1c at the rear end fitting to the upward facing convex portion 4d being as a fulcrum. However, since the hose retainer 49 for fixing the hose 6



connecting the vacuum cleaner body 1 and the support pipe 2 to the support pipe 2 is arranged at a higher position than the clamping hook 10 as shown in Fig. 1, tumbling of the vacuum cleaner body 1 can be prevented by the tension of the hose 6 after fixing the hose 6 to the support pipe 2 by means of the hose retainer 49.

A rotation locking mechanism 14 is shown in Figs. 2 to 5 which is the rotation locking means according to this embodiment for locking the rotation of the rotary bend 3 with respect to the rotary pipe 4 when the vacuum cleaner body 1 is abutted against the rotary pipe 4 at the specified position. This rotation locking mechanism 14 comprises a flat portion 11 formed on the lower surface 1b of the vacuum cleaner body 1, a flat portion 12 formed in the proximity of the connecting portion between the rotary pipe 4 and the rotary bend 3 on the outer surface of the rotary bend 3, and a flat portion 13 formed in the proximity of the flat portion 12 of the rotary bend 3 on the outer surface of the rotary pipe 4.

As shown in Fig. 2, at least a part of the flat portion 12 of the rotary bend 3 and the flat portion 13 of the rotary pipe 4 are made to project from the circumferential surface of the rotary bend 3 or the rotary pipe 4 along a tangential direction of the circumferential surface, the surface areas of the flat portions 12, 13 are made wide. Therefore, these can more easily and reliably contact the flat portion 11 on the side of the vacuum cleaner body 1.

When transforming the electric vacuum cleaner of the above described arrangement into the upright condition for use, the vacuum cleaner body 1 is made to abut against the rotary pipe 4 at the specified position by engagement between the concave portion 1c and the convex portion 4d. By this operation, both the flat portion 12 of the rotary bend 3 and the flat portion 13 of the rotary pipe 4 are made to abut against the flat portion 11 on the side of the vacuum cleaner body 1, whereby the rotation between the rotary pipe 4 and the rotary bend 3 can be locked.

Therefore, the support pipe 2 and rotary bend 3 cannot be inclined as to rotate with respect to the suction device 5. Consequently, no force in a rotating direction is applied to an users hand holding the grip 7  
5 on the upper portion of the support pipe 2.

Even in a case where the rotary bend 3 is at a somewhat distorted position with respect to the rotary pipe 4, this distortion is automatically corrected, since the rotary bend 3 faces to the front such that the flat  
10 portion 12 is parallel to the flat portion 11 on the side of the vacuum cleaner body 1 when making the vacuum cleaner body 1 abut against the rotary pipe 4. The clamping hook 10 can thus be easily fitted to the upward facing concave portion 1d on the upper surface of the  
15 vacuum cleaner body 1.

On the other hand, when transforming to a condition where the vacuum cleaner body 1 is detached from the support pipe, detaching the vacuum cleaner body 1 from the rotary pipe 4 at the specified position causes the  
20 flat portions 12, 13 separate from the flat portion 11, whereby the rotation locking condition between the rotary pipe 4 and rotary bend 3 is released to enable free rotation (see Figs. 5(a), (b)).

Therefore, when rotating the rotary bend 3 by  
25 approximately 90 degrees as to be parallel to the floor surface as shown in Fig. 5(b) in a condition where the vacuum cleaner body is detached from the support pipe, a full-flat condition as shown in Fig.6 is assumed and the suction device 5 can be inserted into narrow spaces such  
30 as under a bed.

It should be noted that while the present embodiment has been explained by taking an example in which the rotation locking mechanism 14 comprising the flat portions 11, 12 and 13 is employed as the rotation  
35 locking means for locking rotation between the rotary bend 3 and the rotary pipe 4 in the upright condition for use, the present invention is not limited to this, and it goes without saying that a rotation locking means of another

type might also be employed.

An alternative type rotation locking means might be a type in which projections are formed on the rotary bend 3 and the rotary pipe 4 which are fitted to concave portions formed on the vacuum cleaner body 1.

In the electric vacuum cleaner according to this embodiment, improvements have been made in that exhausted gas from the side surface of the vacuum cleaner body is not directed to the user in none of the upright condition for use (see Fig. 1), in the condition where the vacuum cleaner body is detached from the support pipe (see Fig. 13), or in the handy condition (see Fig. 12) as shown in Figs. 9 to 13.

There has been conventionally known electric vacuum cleaners which are capable of being used in two conditions, that is, (1) an electric vacuum cleaner which can be concurrently used in an upright condition and in a handy condition, and (2) an electric vacuum cleaner which can be concurrently used in an upright condition and in a condition where the vacuum cleaner body is detached from the support pipe. Both of them are provided with exhaust outlets at proper positions to exhaust gas into proper directions. In the case of (1), the exhaust outlet is provided on the side surface on the upper portion of the vacuum cleaner when in the upright condition for use, wherein exhausted gas is directed to the user, and in the case of (2), the exhaust outlet is provided on the front surface on the lower portion of the vacuum cleaner body, wherein exhausted gas is directed to the side opposite to the user.

However, it has not been known for an electric vacuum cleaner which can be used in three conditions as that of this embodiment, and applying either of the exhaust outlets of case (1) or (2) would cause inconveniences that, in either of the three condition for use, the user would be exposed to exhausted gas or exhausted gas would fling up dust.

In order to solve these problems, the exhaust

outlet 21 of the vacuum cleaner body 1 according to this embodiment is of slit-type which is inclined diagonal-rearward when seen from the side of the vacuum cleaner body 1 as shown in Figs. 10, 12 and 13, and a  
5 section of the vacuum cleaner body seen from the upper surface side of the vacuum cleaner body 1 (a horizontal section of the vacuum cleaner body 1) is open to diagonal-frontward with respect to the vacuum cleaner body 1 as shown in Fig. 9.

10 Moreover, the exhaust channel in the interior of the vacuum cleaner body 1 is so arranged as shown in Fig. 9 that exhausted gas is once sent to the rear of the vacuum cleaner body 1 from rearward of a motor 22 and exhausted from the side in a winding manner.

15 As shown in Fig. 9, exhausted gas which is exhausted from the motor 21 is made to flow rearward of the motor 21 (i.e. downward in Fig. 9), separated into two directions and made to flow to a spaced portion 24 lying between an outer wall 1e of the vacuum cleaner body 1 and  
20 a rib (separating wall) 23 provided between the outer wall 1e and the motor 22. The exhausted gas is turned over in the spaced portion 24 and is exhausted to diagonal-frontward (diagonal-upward in Fig. 9). Thereafter, exhausted gas is guided diagonal-frontward at  
25 a specified angle by a guide rib 25 of a diagonal-forward inclined shape and the slit-shaped exhaust outlet 21.

As shown in Fig. 10, the slit-shaped exhaust outlet 21 is open in a diagonal-frontward inclined shape when seen from the side of the vacuum cleaner body 1,  
30 whereby exhausted gas is exhausted to diagonal-upward as indicated by arrow B.

Thus, the user who is on the right-hand side with respect to the vacuum cleaner in Fig. 10 will not be exposed to exhausted gas in the upright condition for use  
35 shown in Figs. 10 and 11 so that the vacuum cleaner can be comfortably used without flinging up any dust on the floor surface.

In the handy condition of Fig. 12, the vacuum

cleaner body 1 is used in a condition where the suction inlet 1a is facing downward, but the user who is on the right-hand side with respect to the vacuum cleaner body 1 in Fig. 12 would not be exposed to exhausted gas so that  
5 the vacuum cleaner can be comfortably used without flinging up any dust on the floor surface.

Further, in the condition where the vacuum cleaner body is detached from the support pipe as shown in Fig. 13, the vacuum cleaner body 1 is used in a condition  
10 where the suction inlet 1a is directed horizontally, but the user who is on the right-hand side with respect to the vacuum cleaner body 1 in Fig. 13 would not be exposed to exhausted gas so that the vacuum cleaner can be comfortably used without flinging up any dust on the floor  
15 surface.

It should be noted that the number of parts can be decreased by integrally forming the exhaust outlet 21 for guiding direction of exhausted gas with the vacuum cleaner body 1 (especially on the lower portion in Fig.  
20 9).

The present embodiment is further arranged in that a C-ring 30 is employed as a bend setting ring for enabling easy attaching/detaching between the support pipe 2 and the rotary bend 3, between other pipes or between a  
25 pipe and a hose as shown in Figs. 2, 14 and 15, wherein the C-ring 30 is always fitted to a groove 25 formed on the surface of the support pipe 2.

In the present embodiment, a C-ring 30 which is a ring applied with a so-called C cut is employed as shown  
30 in Figs. 14 and 15. By abutment of the rotary bend 3 against the C-ring 30 when the rotary bend 3 is fitted to the support pipe 2, the C-ring 30 is once lifted in an automatic manner from the surface of the support pipe 2 and is enabled to perform a returning action by  
35 elasticity (spring characteristics) of the C-ring 30.

Moreover, the C-ring 30 is so arranged that the C-ring 30 is always fitted to the interior of the groove 25 formed on the outer surface of the support pipe

2. The inner surface side of the C-ring 30 is provided with a convex portion 30a which projects into the interior of the support pipe 2 through a hole 25a formed on the bottom surface of the groove 25. Therefore, when fitting  
5 the rotary bend 3 to the support pipe 2, the convex portion 30a can be caught by the groove 25 as shown in Fig. 15(b) even if the C-ring 30 is once lifted from the surface of the support pipe 2, whereby the C-ring 30 is prevented from falling from the support pipe 2.

10 By the above described arrangement of the C-ring 30 and the groove 25, when performing fitting of the rotary bend 3 to the support pipe 2, the rotary bend 3 might be simply inserted into the support pipe 2 from a condition shown in Fig. 14(a) without touching the C-ring  
15 30. That is, by the convex portion 30a pressing to the outer surface of the rotary bend 3, the C-ring 30 is once lifted from the surface of the support pipe 2 (see Fig. 15(b)), and thereafter, the C-ring 30 is returned onto the surface of the support pipe 2 by elasticity thereof  
20 while the convex portion 30a fits to the rotary bend 3e, whereby fitting between pipes can be performed without gripping the C-ring 30 by hand.

On the other hand, when removing the rotary bend 3 from the support pipe 2, the C-ring 30 is pinched  
25 by hand, and the concave portion 30a is caught at the interior of the groove 25 as described above, which enables detachment of the rotary bend 3 without the C-ring 30 completely being detached from the support pipe 2.

In the electric vacuum cleaner shown in Figs. 1  
30 and 4, the lower surface 1b of the vacuum cleaner body 1 is fixed to the front side of the support pipe 2 in a freely detachable manner by a fixing method which will be described later. Further, the upper end opening 2a of the support pipe 2 is formed on the front side of the support  
35 pipe 2. The hose 6 connecting between the vacuum cleaner body 1 and the support pipe 2 is arranged on the front side of the support pipe 2 over its full length. Due to this arrangement, the hose 6 does no longer contact the

user in the rear side of the support pipe 2 in the upright condition for use of Fig. 1, whereby operation is made easy.

As shown in Fig. 1, at least a part of the upper portion of the support pipe 2, for instance, a bent portion 2b in the upper portion of the support pipe 2, is bent to the front side of the support pipe, and the upper end opening 2a is formed on the upper end of the bend portion 2b of the support pipe 2, the hose 6 to be connected to the upper end opening 2a can still further be receded from the user, which enables easier operation.

Moreover, since a grip 7 is fixed to the rear side of the bent portion 2b, the grip 7 can be easily held by hand and can further be easily operated.

Further, as shown in Fig. 17, the electric vacuum cleaner according to this embodiment is so arranged that the hose 6 is provided as to be symmetrical with respect to the vacuum cleaner body 1 and the support pipe 2 when seen from the front of the electric vacuum cleaner in Fig. 17, there are no differences in operability between a right-handed person and a left-handed person.

Moreover, since the electric vacuum cleaner according to this embodiment is so arranged that internal components of the vacuum cleaner body 1 such as motor 22 which might influence weight balance are also arranged symmetrically when seen from the front of the electric vacuum cleaner as shown in Fig. 9, there are no differences in operability between a right-handed person and a left-handed person. It should be noted that numeral 21 in Fig. 9 denotes an exhaust hole formed in the outer wall 1e of the vacuum cleaner body 1, 23 a rib, 24 a spaced portion and 25 a rib for changing the flow of exhausted gas.

As shown in Figs. 1 and 18, the electric vacuum cleaner of the present embodiment also has improvements in an accommodation portion of attachments for efficiently utilizing the available space.

Attachments such as a crevice nozzle have

conventionally been accommodated into housing portions formed by denting the rear portion of the vacuum cleaner body or by attaching a separated housing of ring-shape or cylindrical-shape to the vacuum cleaner body or to the proximity of the grip. However, when accommodating them into the rear portion of the vacuum cleaner body, the accommodating position of the attachments will be low, which is troublesome since the user needs to squat down each time attachments are to be attached/detached. On the other hand, in the latter case, addition of a separate element for accommodation would be necessary and would also require additional space.

By the arrangement of accommodating attachments such as crevice nozzle 43 in a space between a pair of opposing code racks 41a, 41b provided in the rear side of the support pipe 2 for winding up a power supply code 42 as shown in Figs. 1 and 8, space can be efficiently utilized. An additional element for fixing the attachments can be eliminated and provision of the attachments accommodating portion close to the grip 7 enables easy operation.

As shown in Fig. 18, by engaging a lower end of the crevice nozzle 43 to a triangle rib 44 projecting upward from the code rack 41b and by fitting a semi-spherical projection 45 projecting from both sides of an upper end of the crevice nozzle 43 into a hole 44a of a triangle rib 44 projecting downward from the code rack 41a, the crevice nozzle 43 can be accommodated between the code racks 41a, 41b. Further, by providing ribs 46, 47 on the outer surface of the support pipe 2 located between the code racks 41a, 41b, space can be secured between the crevice nozzle 43 and the support pipe 2 which enables it to easily detach the crevice nozzle 43.

When using the electric vacuum cleaner in the upright condition for use as shown in Fig. 1, the power supply code 42 is used by untying it from the code racks 41a, 41b. At this time, the power supply code 42 might be disturbing when extending in the proximity of the users



feet. In the present embodiment, by making the power supply code 42 engage with the grip 7 in a attachable/detachable manner, the power supply code 42 would not disturb the user. More particularly, at least  
5 a pair of claw portions 48 are provided in an opposing manner in the interior of the grip 7 for holding the power supply code 42. By engaging the power supply code 42 with the claw portions 48, the power supply code 42 draws a loop and reaches the ground with the grip 7 being the  
10 start point as shown by the two-dot chain line of Fig. 1, whereby the feet of the user are not disturbed and easy operation is enabled. It should be noted that the claw portions 48 might be provided as a different member from the grip 7.

15 According to the present invention, the suction device is provided with running wheels, and the vacuum cleaner body is made to run by using these wheels of the suction device in a condition where the vacuum cleaner body is attached to the support pipe, whereby the cleaning  
20 workability can be improved. Further, the external appearance of the vacuum cleaner body in a condition of being detached from the support pipe can be improved.

In the upright condition for use, the rotary bend which receives the load of the vacuum cleaner body is  
25 prevented from rotating relative to the rotary pipe on the side of the suction device, whereby no force in a rotating direction is applied to the users hand holding the grip, and operation is made easy.

Moreover, by enabling rotation between the  
30 rotary bend and the rotary pipe in the condition where the vacuum cleaner body is detached from the support pipe, the suction device can be inserted into narrow spaces such as under a bed so that the sphere of usage is not limited.

Further, according to the present invention,  
35 attaching/detaching of the vacuum cleaner body to/from the support pipe is made easy whereby operation is made by far easier.

By arranging the position of the hose retainer

more higher than the upper engagement position of the vacuum cleaner body and the support pipe, stability of the vacuum cleaner body during the attaching/detaching processes of the vacuum cleaner body can be improved.

- 5 Further, according to the prevent invention, the hose would not contact the user and can be smoothly used in the upright condition for use. Since the hose would not contact the user, the user would also not feel uncomfortable and is able to comfortably perform cleaning.

WHAT IS CLAIMED IS:

1           1. An electric vacuum cleaner comprising a  
2 vacuum cleaner body, a hose to be connected to the vacuum  
3 cleaner body, a support pipe to be connected to the hose,  
4 and a suction device to be connected to the support pipe,  
5 wherein the suction device is provided with running  
6 wheels, and the vacuum cleaner body is able to be  
7 detachably fastened to the support pipe, and is made to  
8 run by the wheels of the suction device in a condition  
9 where the vacuum cleaner body is attached to the support  
10 pipe.

1           2. An electric vacuum cleaner comprising a  
2 vacuum cleaner body, a hose to be connected to the vacuum  
3 cleaner body, a support pipe to be connected to the hose,  
4 a rotary pipe to be connected to the support pipe in a  
5 rotatable manner, and a suction device to be connected to  
6 the rotary pipe,  
7 wherein the vacuum cleaner body is arranged such that  
8 the vacuum cleaner body can be fastened to the support  
9 pipe in a detachable manner and wherein the electric  
10 vacuum cleaner is provided with a rotation regulating  
11 means for preventing rotation of the rotary pipe with  
12 respect to the support pipe when the vacuum cleaner body  
13 is attached to the support pipe.

1           3. An electric vacuum cleaner of the present  
2 invention comprising:  
3           (a) a vacuum cleaner body,  
4           (b) a support pipe connected to a suction inlet of  
5 the vacuum cleaner body,  
6           (c) a rotary bend connected to the support pipe,  
7           (d) a rotary pipe connected to the rotary bend in a  
8 rotatable manner, and  
9           (e) a suction device connected to the rotary pipe,  
10           wherein the vacuum cleaner body is attached to  
11 the support pipe in an attachable/detachable manner, and

12 wherein the electric vacuum cleaner further includes a  
13 rotation locking means for locking rotation of the rotary  
14 bend with respect to the rotary pipe when the vacuum  
15 cleaner body is attached to the rotary pipe at a  
16 specified position.

1           4. The electric vacuum cleaner of Claim 3,  
2 wherein the rotation locking means comprises a flat  
3 portion formed on the vacuum cleaner body, a flat portion  
4 formed on the rotary bend, and a flat portion formed on  
5 the rotary pipe.

1           5. The electric vacuum cleaner of Claim 4,  
2 wherein at least a part of the flat portion of the rotary  
3 bend and the flat portion of the rotary pipe is so formed  
4 as to project from a circumferential surface of the rotary  
5 bend or rotary pipe along a tangential direction of the  
6 circumferential surface.

1           6. The electric vacuum cleaner of Claim 3,  
2 wherein the rotation locking means comprises projections  
3 formed on the rotary bend and the rotary pipe, and concave  
4 portions formed on the vacuum cleaner body for fitting  
5 with the projections.

1           7. An electric vacuum cleaner comprising a  
2 vacuum cleaner body, a hose to be connected to the vacuum  
3 cleaner body, a support pipe to be connected to the hose,  
4 and a suction device to be connected to the support pipe,  
5 wherein the support pipe is provided with a  
6 first engaging portion which detachably engages with a  
7 first receiving portion formed in a rear portion of the  
8 vacuum cleaner body, and a second engaging portion which  
9 detachably engages with a second receiving portion formed  
10 in a front portion of the vacuum cleaner body.

1           8. The electric vacuum cleaner of Claim 7,  
2 wherein the second engaging portion of the support pipe

3 is movable up and down.

1           9. The electric vacuum cleaner of Claim 8,  
2 wherein a tip portion of the second engaging portion of  
3 the support pipe is formed with a slanting surface that is  
4 inclined in an upward direction with receding from the  
5 support pipe.

1           10. The electric vacuum cleaner of Claim 8,  
2 wherein the electric vacuum cleaner includes an energizing  
3 means that energizes the second engaging portion of the  
4 support pipe in a downward direction.

1           11. An electric vacuum cleaner comprising a  
2 vacuum cleaner body, a hose to be connected to the vacuum  
3 cleaner body, a support pipe to be connected to the hose,  
4 and a suction device to be connected to the support pipe,  
5 wherein the vacuum cleaner body is detachably fastened to  
6 a front of the support pipe, and wherein the hose is  
7 connected to the vacuum cleaner body and the hose in the  
8 front of the support pipe.

1           12. The electric vacuum cleaner of Claim 11,  
2 wherein at least a part of an upper portion of the support  
3 pipe is bent to the front side of the support pipe, and an  
4 opening is formed at the upper end of the bent portion of  
5 the support pipe.

1           13. The electric vacuum cleaner of Claim 12,  
2 wherein a grip is fastened to a rear side of the bent  
3 portion of the support pipe.

Abstract of the Disclosure

An electric vacuum cleaner comprising a vacuum cleaner body, a hose to be connected to the vacuum cleaner body, a support pipe to be connected to the hose, and a suction device to be connected to the support pipe. The suction device is provided with running wheels, and the vacuum cleaner body is able to be detachably fastened to the support pipe, and is made to run by the wheels of the suction device in a condition where the vacuum cleaner body is attached to the support pipe. The cleaning workability can be improved, and the external appearance of the vacuum cleaner body in a condition of being detached from the support pipe can be improved.

FIG. 1

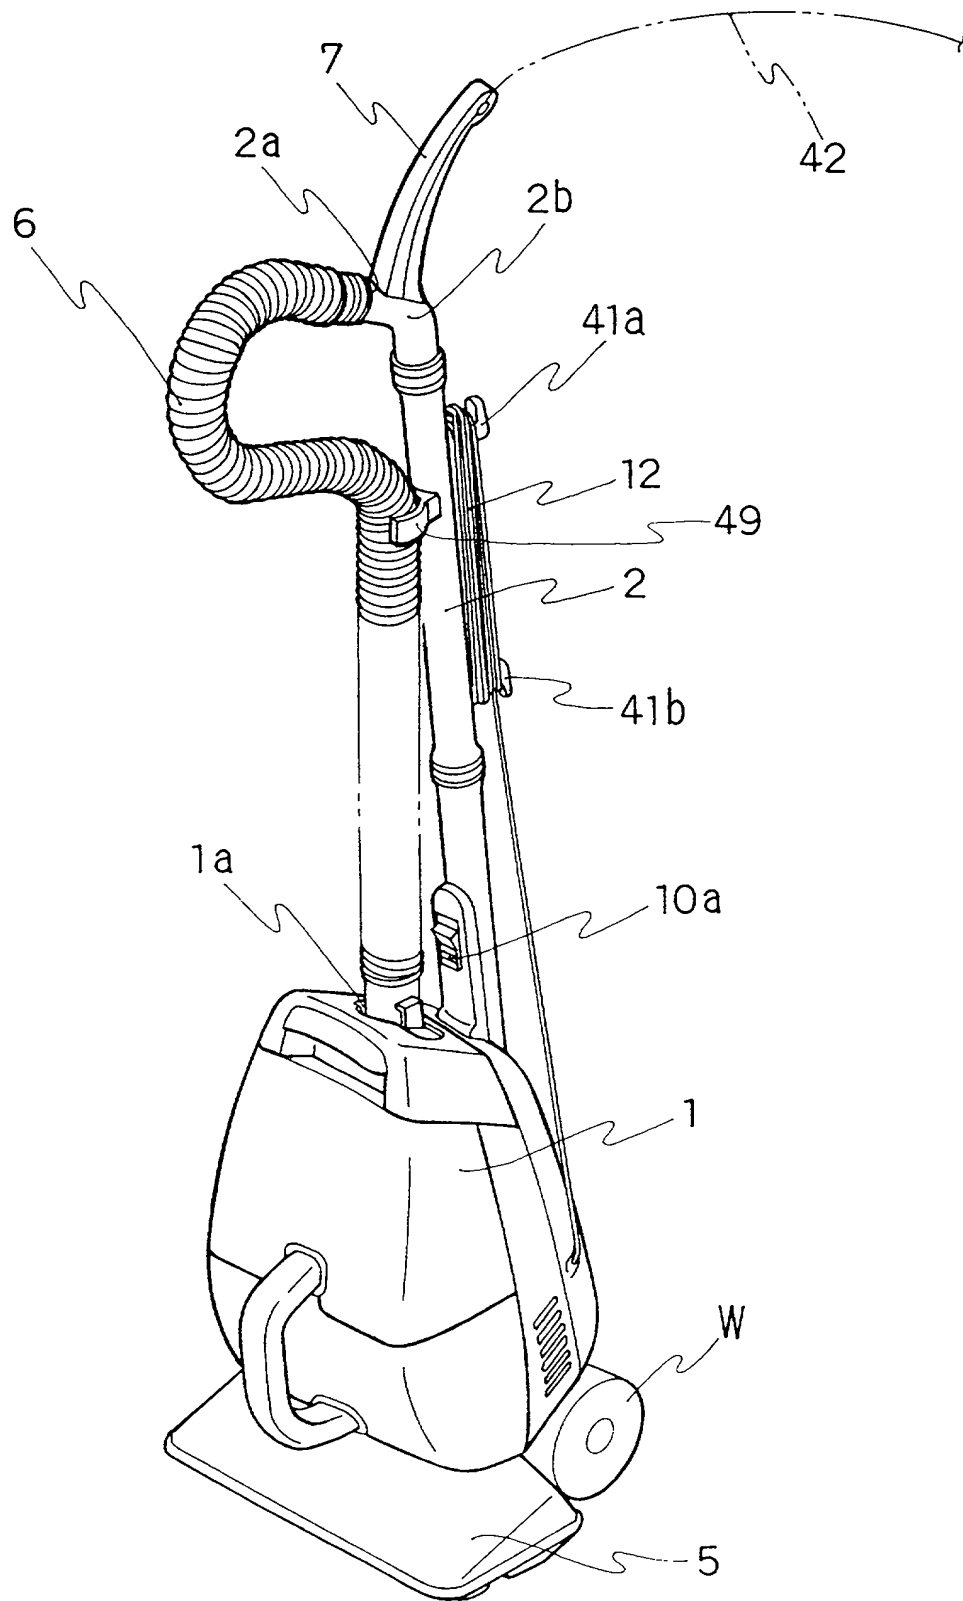


FIG. 2

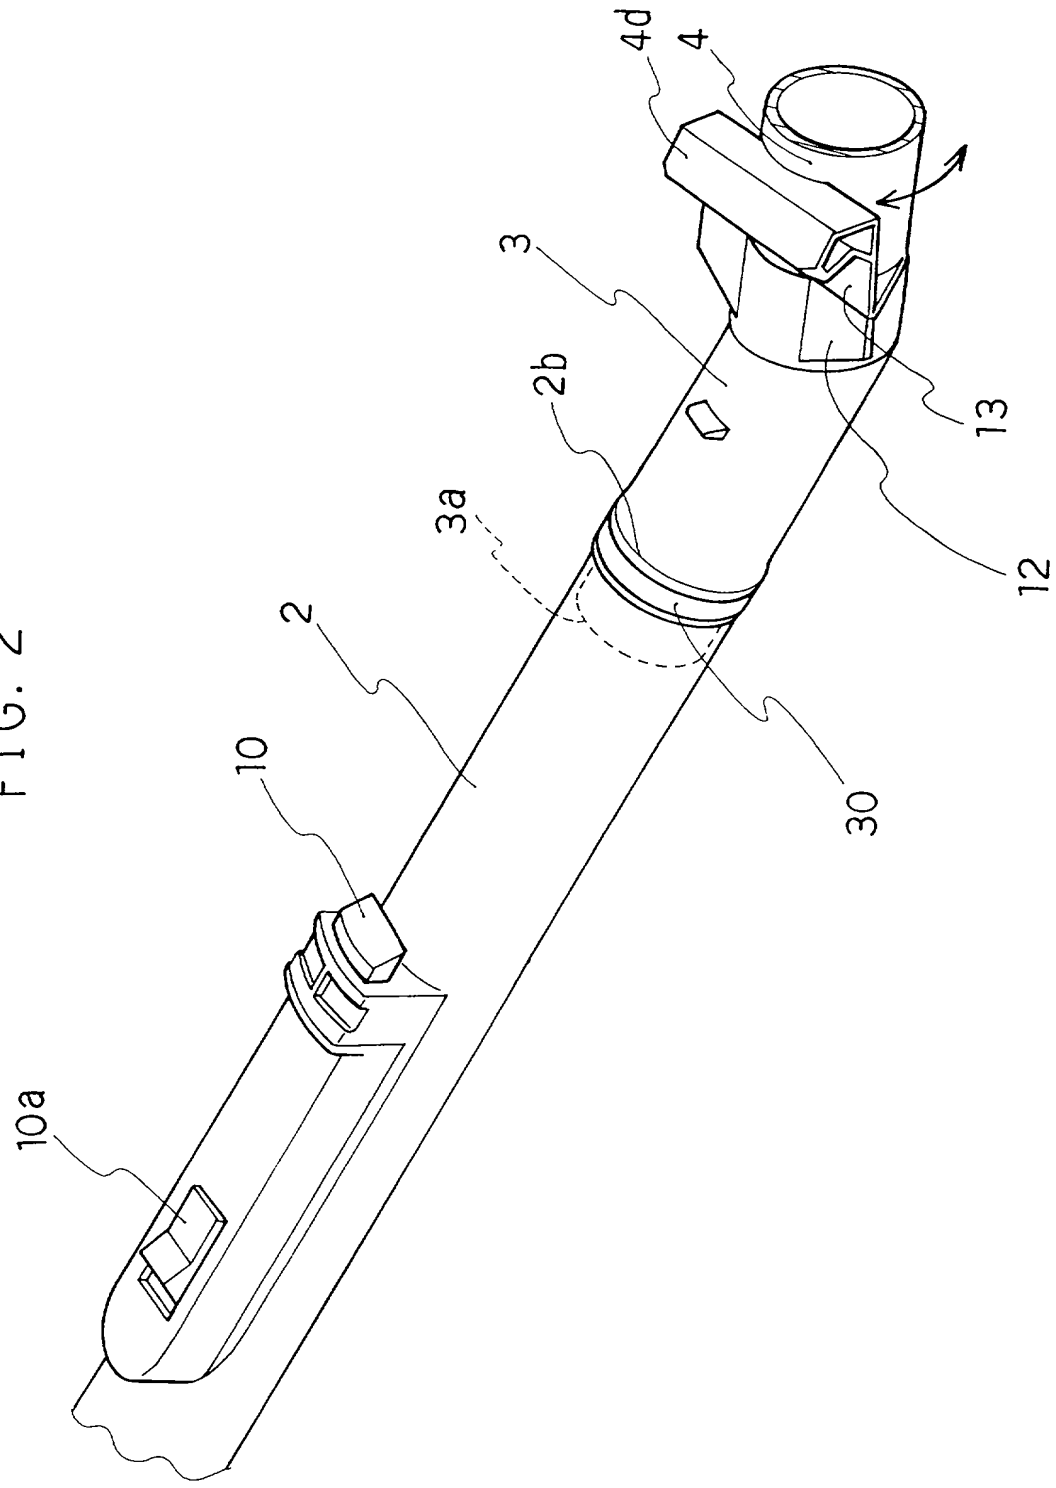




FIG. 3

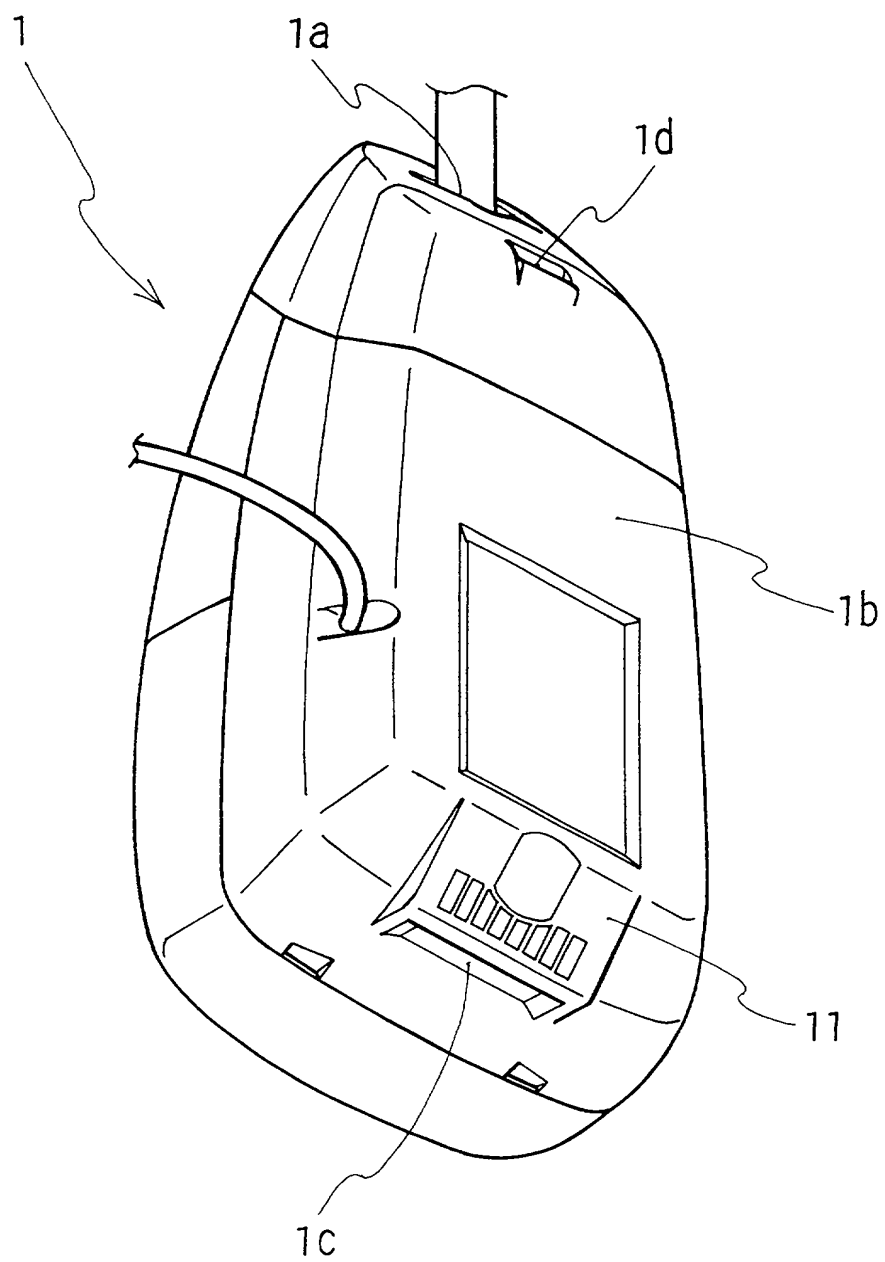


FIG. 4

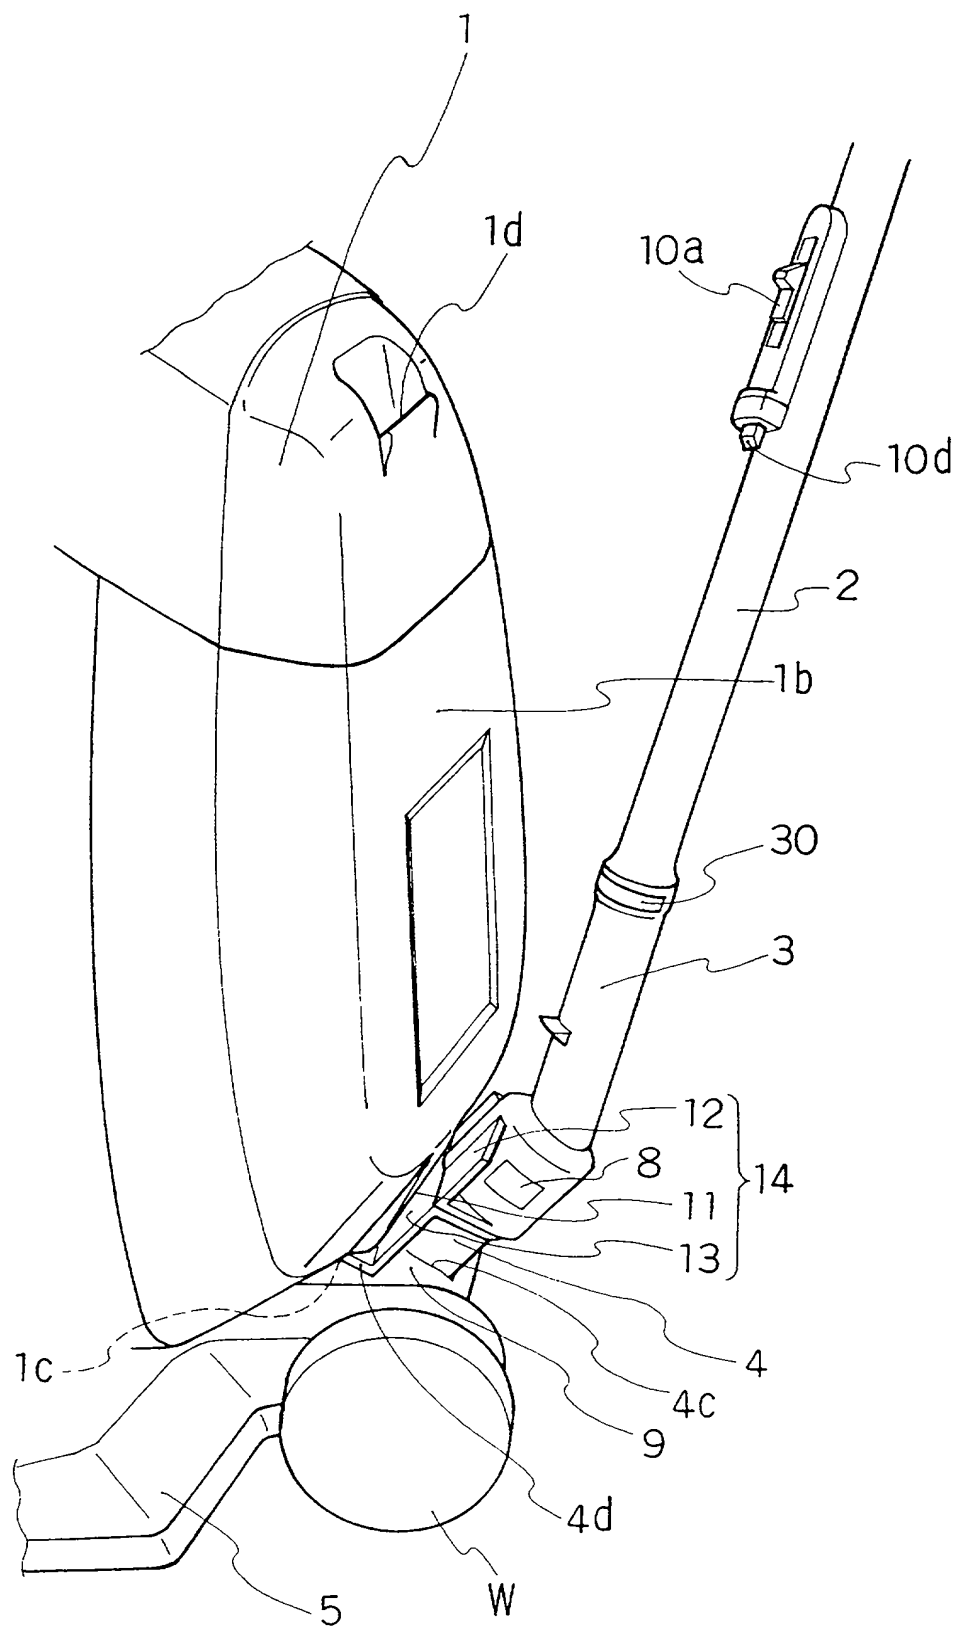


FIG. 5(a)

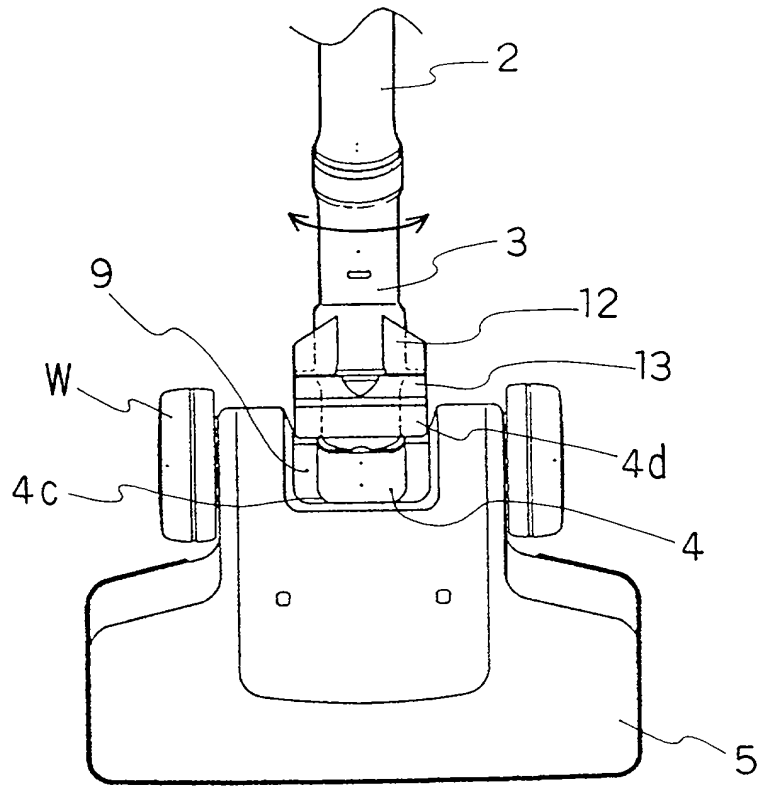


FIG. 5(b)

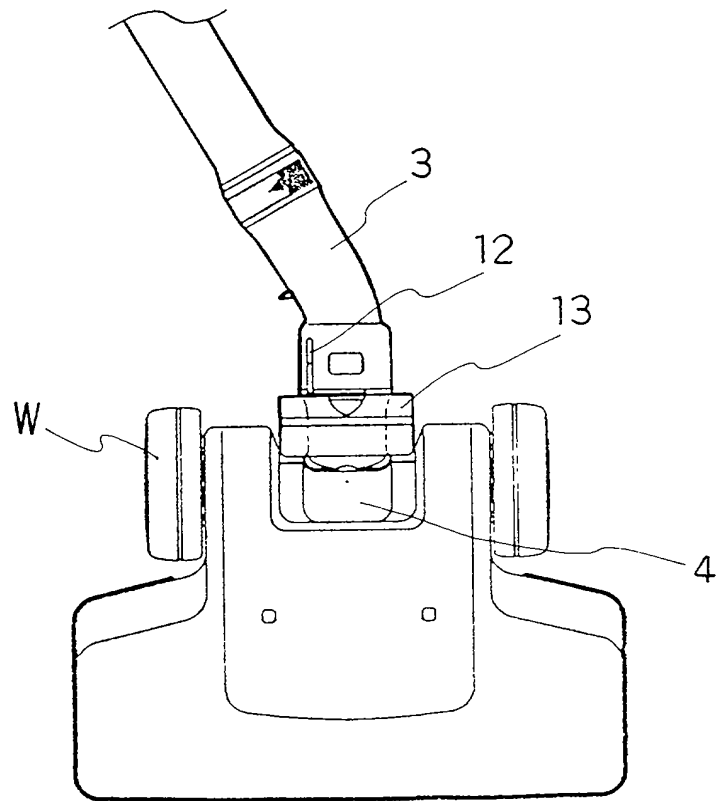


FIG. 6

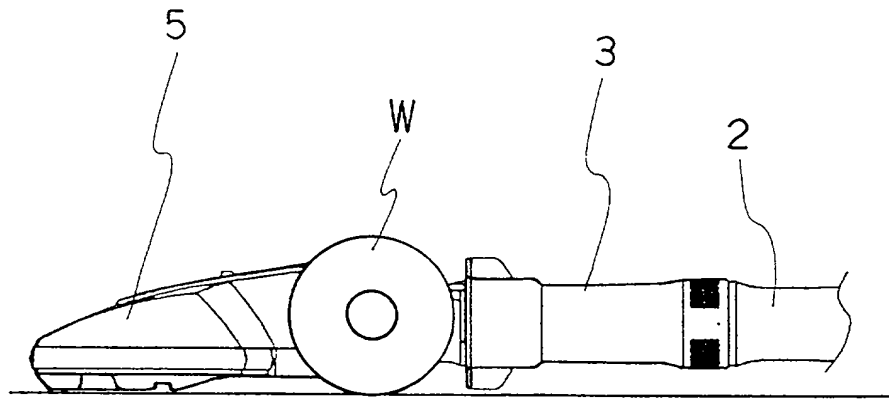


FIG. 7

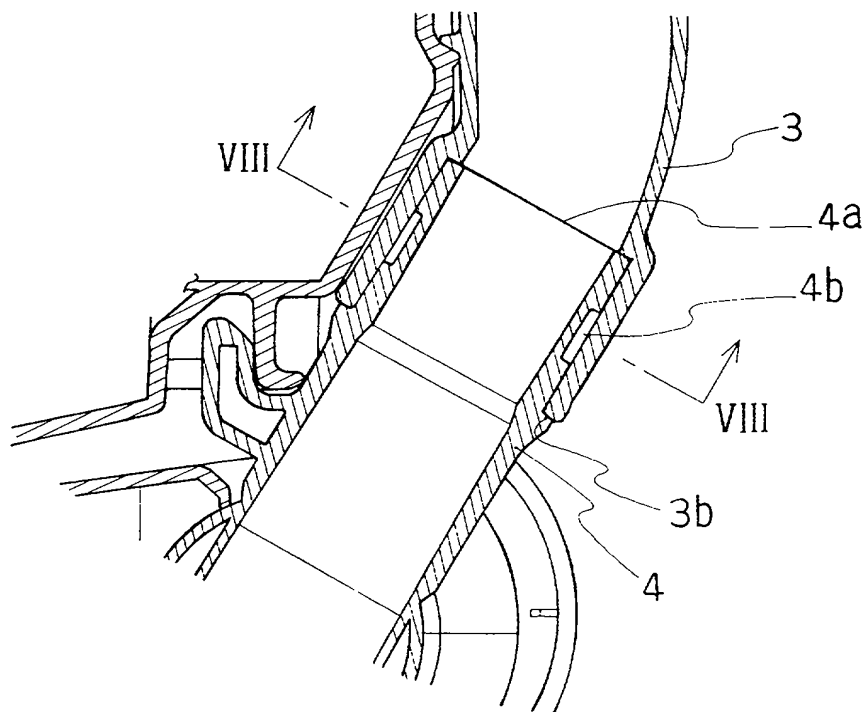


FIG. 8(a)


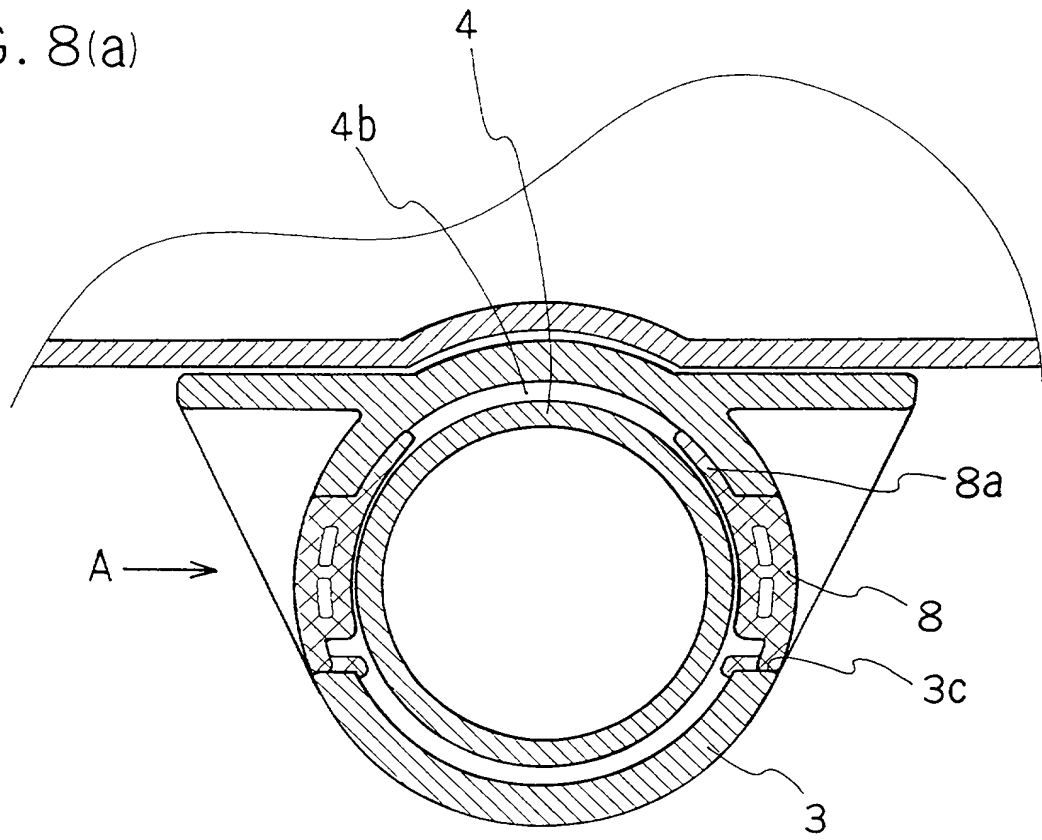


FIG. 8(b)

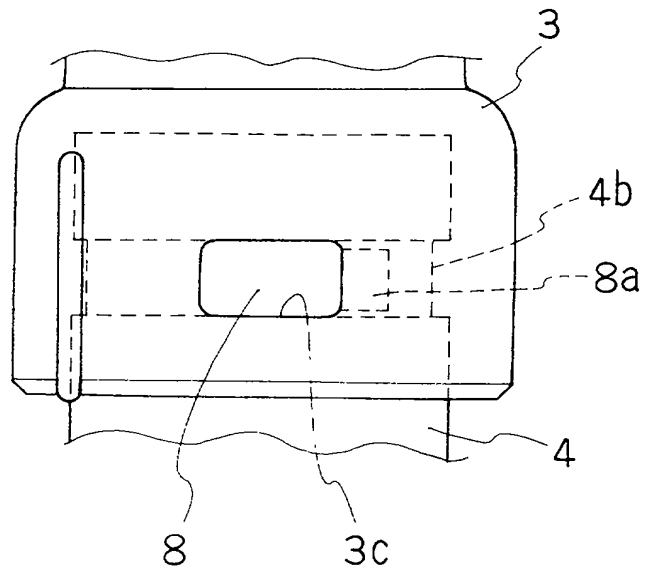

Country	Year	Population (millions)	Urban population (millions)	Urban population (%)	Population density (per sq km)	Urban population density (per sq km)
Algeria	1980	10.0	4.0	40.0	100	400
Algeria	1985	10.5	4.5	42.9	110	450
Algeria	1990	11.0	5.0	45.5	120	500
Algeria	1995	11.5	5.5	47.8	130	550
Algeria	2000	12.0	6.0	50.0	140	600
Algeria	2005	12.5	6.5	52.0	150	650
Algeria	2010	13.0	7.0	53.8	160	700
Algeria	2015	13.5	7.5	55.6	170	750
Algeria	2020	14.0	8.0	57.1	180	800
Algeria	2025	14.5	8.5	58.6	190	850
Algeria	2030	15.0	9.0	60.0	200	900
Algeria	2035	15.5	9.5	61.3	210	950
Algeria	2040	16.0	10.0	62.5	220	1000
Algeria	2045	16.5	10.5	63.6	230	1050
Algeria	2050	17.0	11.0	64.7	240	1100
Algeria	2055	17.5	11.5	65.7	250	1150
Algeria	2060	18.0	12.0	66.7	260	1200
Algeria	2065	18.5	12.5	67.6	270	1250
Algeria	2070	19.0	13.0	68.4	280	1300
Algeria	2075	19.5	13.5	69.2	290	1350
Algeria	2080	20.0	14.0	70.0	300	1400
Algeria	2085	20.5	14.5	70.7	310	1450
Algeria	2090	21.0	15.0	71.4	320	1500
Algeria	2095	21.5	15.5	72.1	330	1550
Algeria	2100	22.0	16.0	72.7	340	1600
Algeria	2105	22.5	16.5	73.3	350	1650
Algeria	2110	23.0	17.0	73.9	360	1700
Algeria	2115	23.5	17.5	74.5	370	1750
Algeria	2120	24.0	18.0	75.0	380	1800
Algeria	2125	24.5	18.5	75.5	390	1850
Algeria	2130	25.0	19.0	76.0	400	1900
Algeria	2135	25.5	19.5	76.5	410	1950
Algeria	2140	26.0	20.0	76.9	420	2000
Algeria	2145	26.5	20.5	77.3	430	2050
Algeria	2150	27.0	21.0	77.8	440	2100
Algeria	2155	27.5	21.5	78.2	450	2150
Algeria	2160	28.0	22.0	78.6	460	2200
Algeria	2165	28.5	22.5	78.9	470	2250
Algeria	2170	29.0	23.0	79.3	480	2300
Algeria	2175	29.5	23.5	79.7	490	2350
Algeria	2180	30.0	24.0	80.0	500	2400
Algeria	2185	30.5	24.5	80.3	510	2450
Algeria	2190	31.0	25.0	80.6	520	2500
Algeria	2195	31.5	25.5	81.0	530	2550
Algeria	2200	32.0	26.0	81.3	540	2600
Algeria	2205	32.5	26.5	81.6	550	2650
Algeria	2210	33.0	27.0	81.8	560	2700
Algeria	2215	33.5	27.5	82.1	570	2750
Algeria	2220	34.0	28.0	82.4	580	2800
Algeria	2225	34.5	28.5	82.6	590	2850
Algeria	2230	35.0	29.0	82.9	600	2900
Algeria	2235	35.5	29.5	83.1	610	2950
Algeria	2240	36.0	30.0	83.3	620	3000
Algeria	2245	36.5	30.5	83.6		

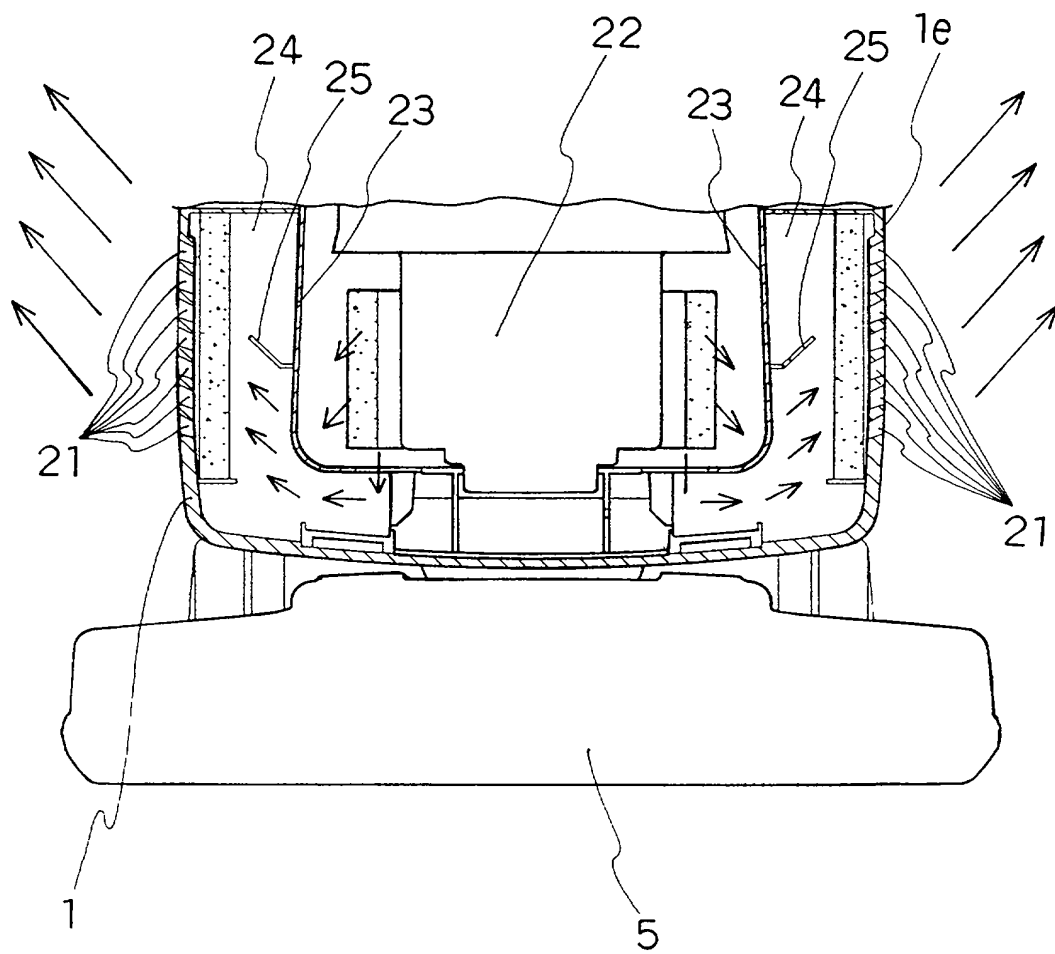


FIG. 10

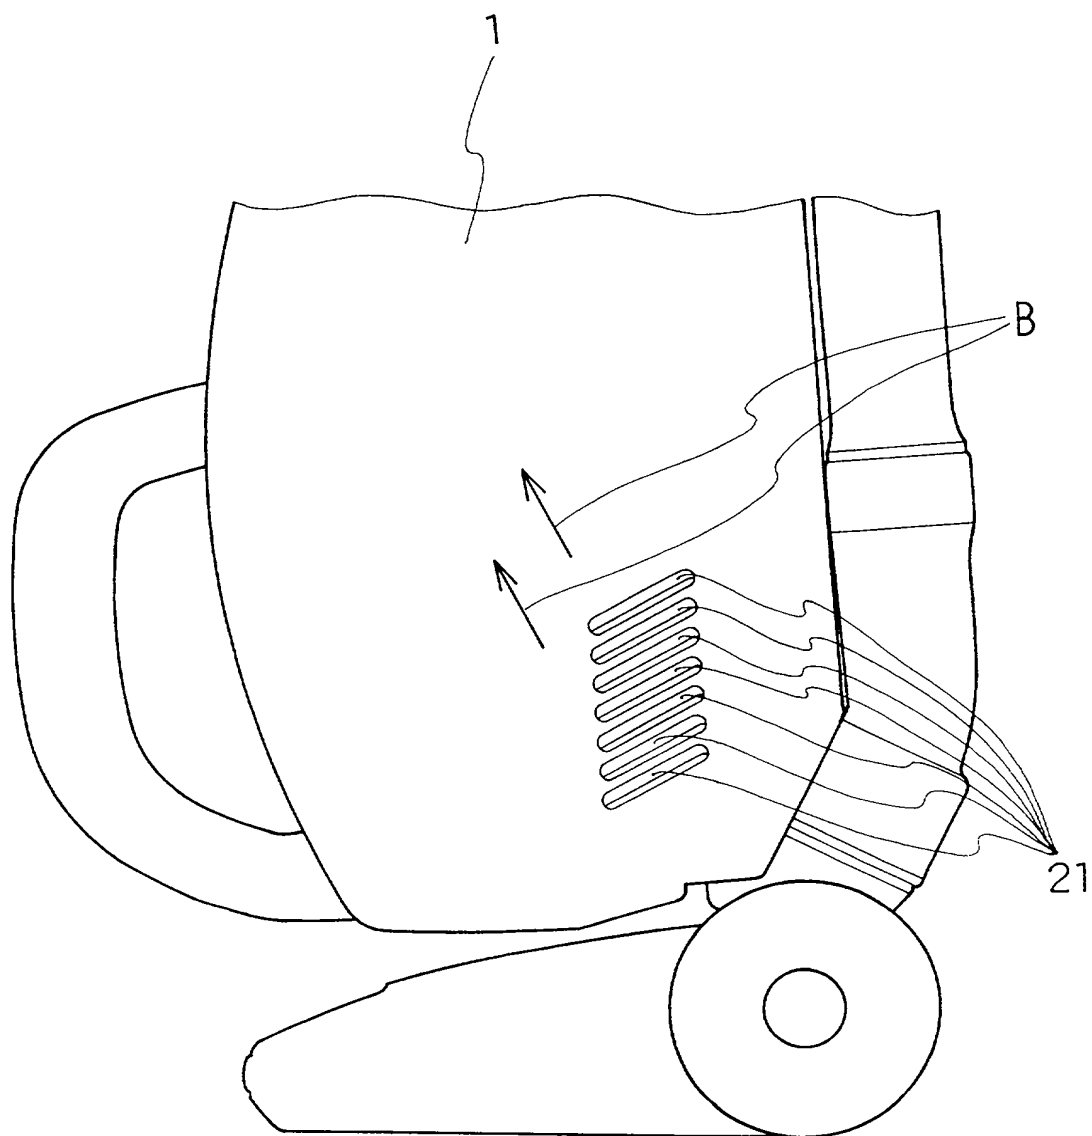


FIG. 11

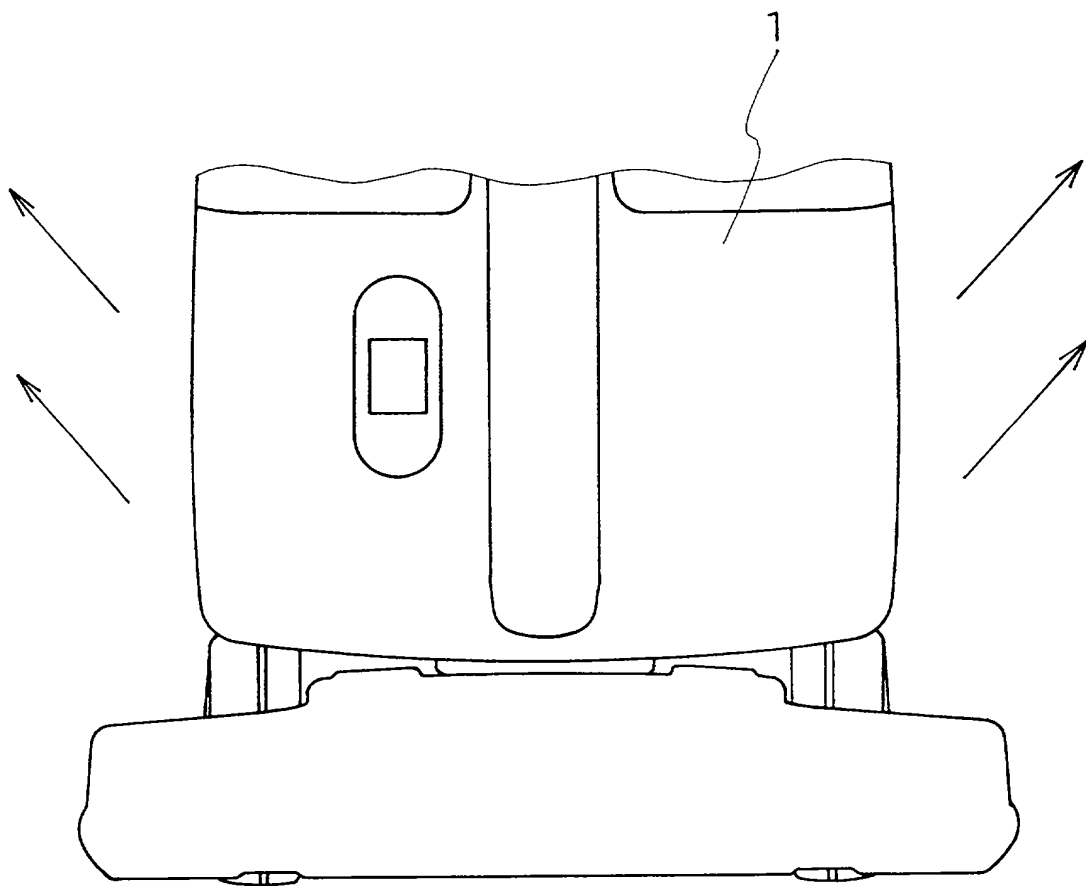




FIG. 12

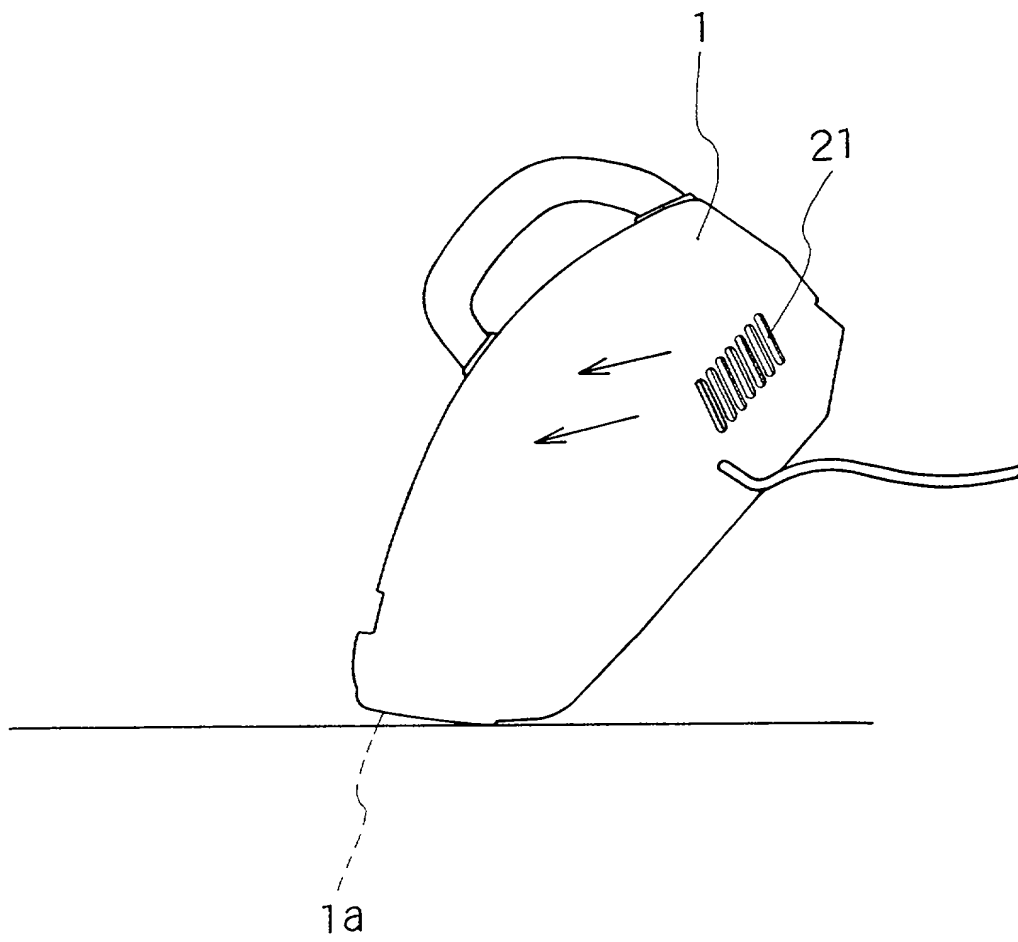


FIG.13

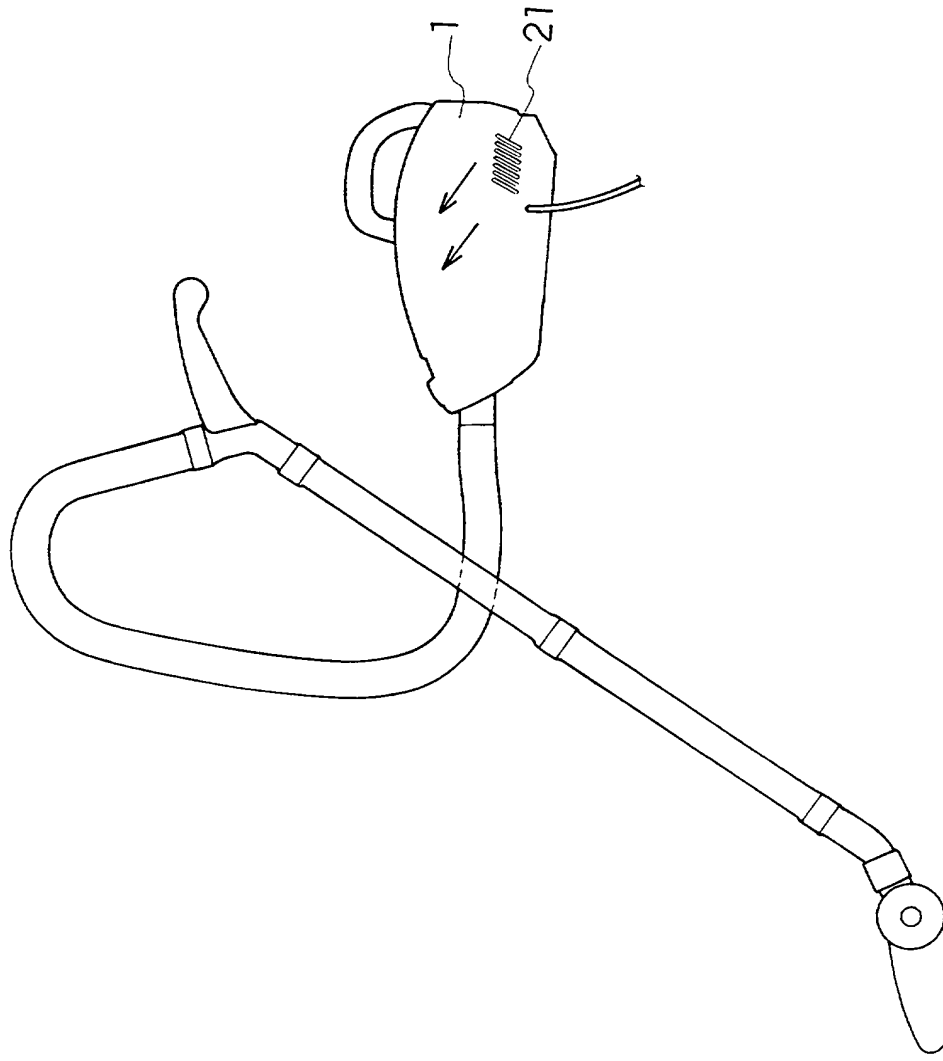


FIG. 14(a)

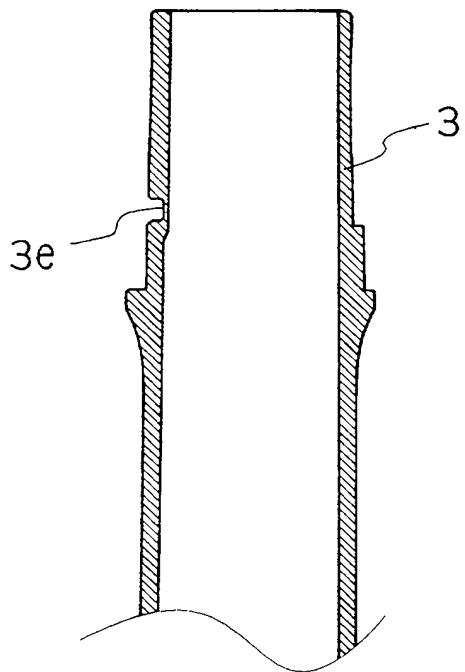
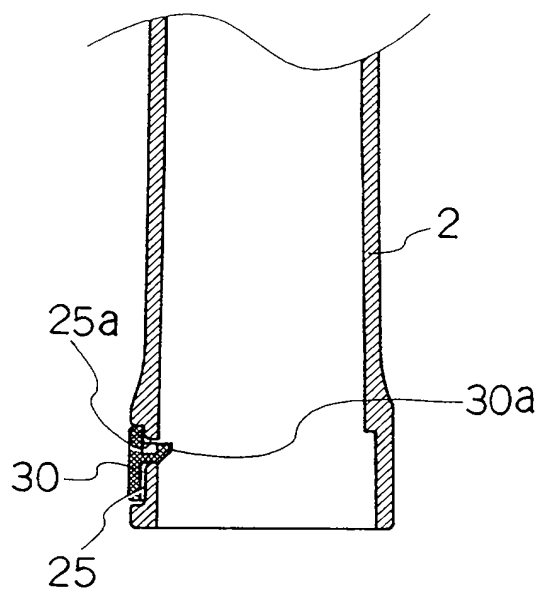


FIG. 14(b)

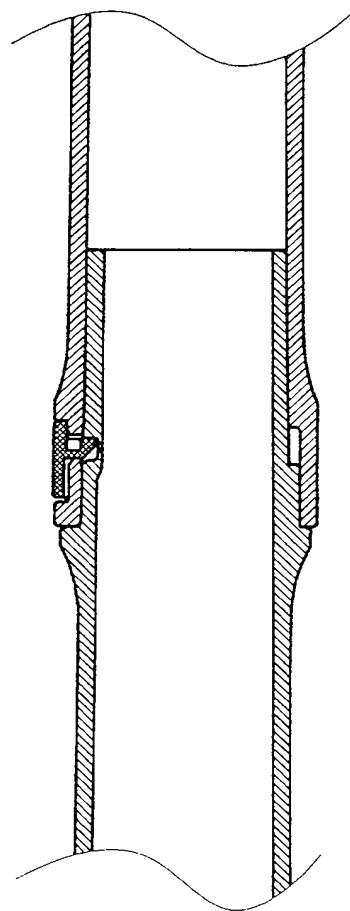


FIG. 15(a)

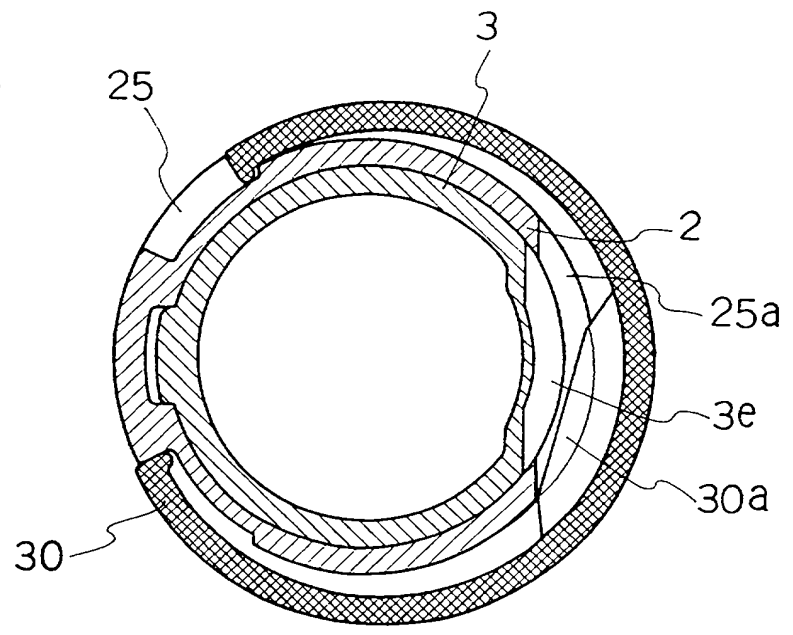


FIG. 15(b)

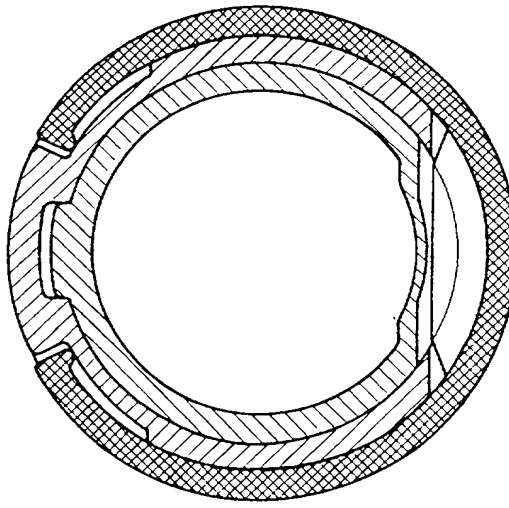


FIG.16

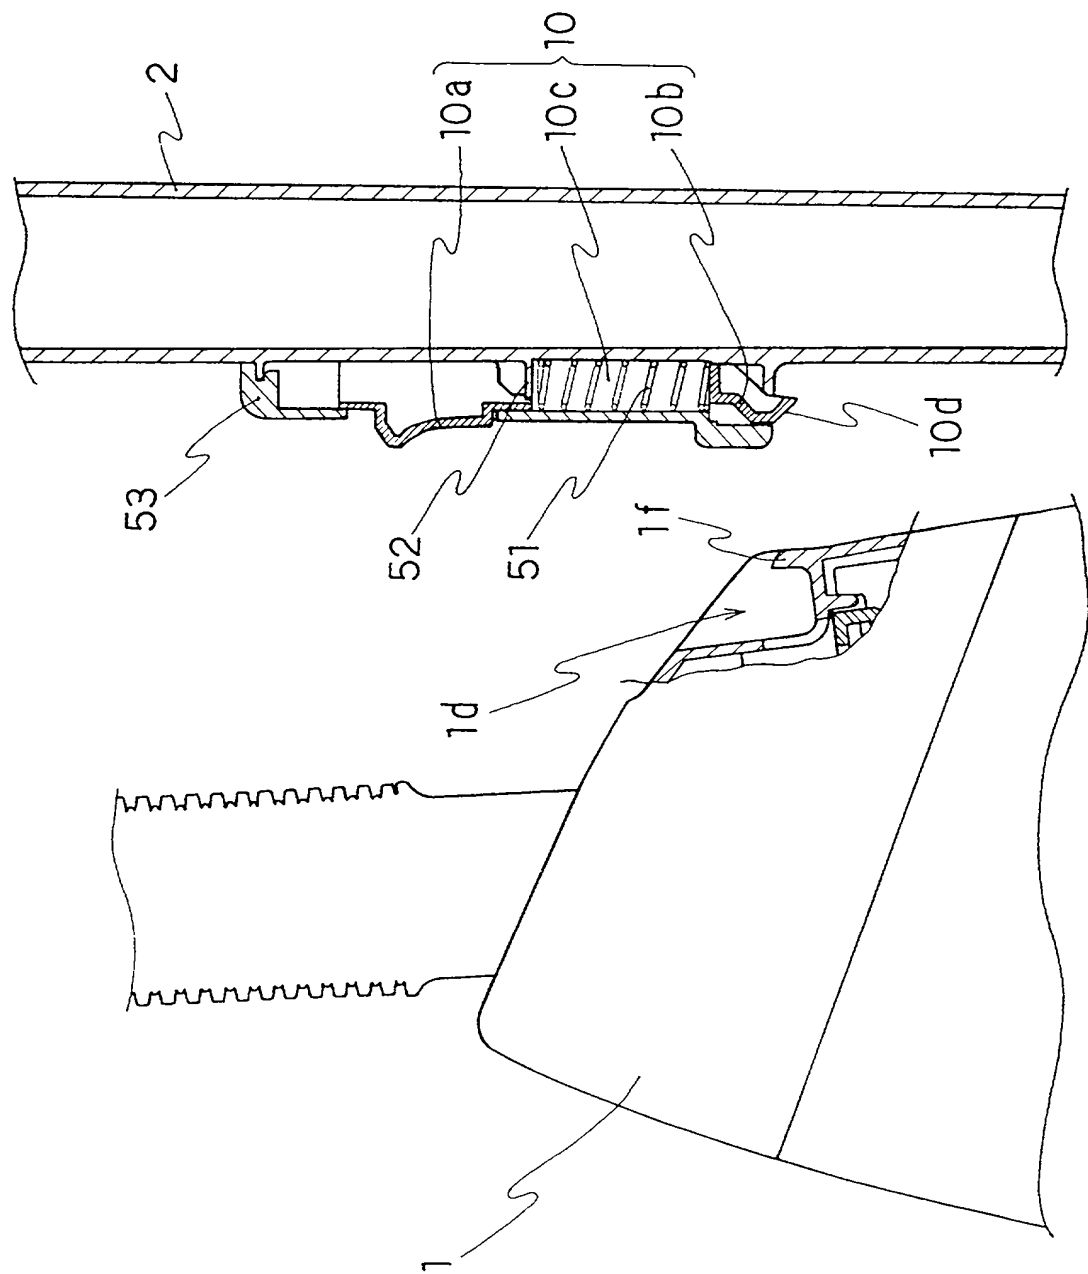


FIG.17

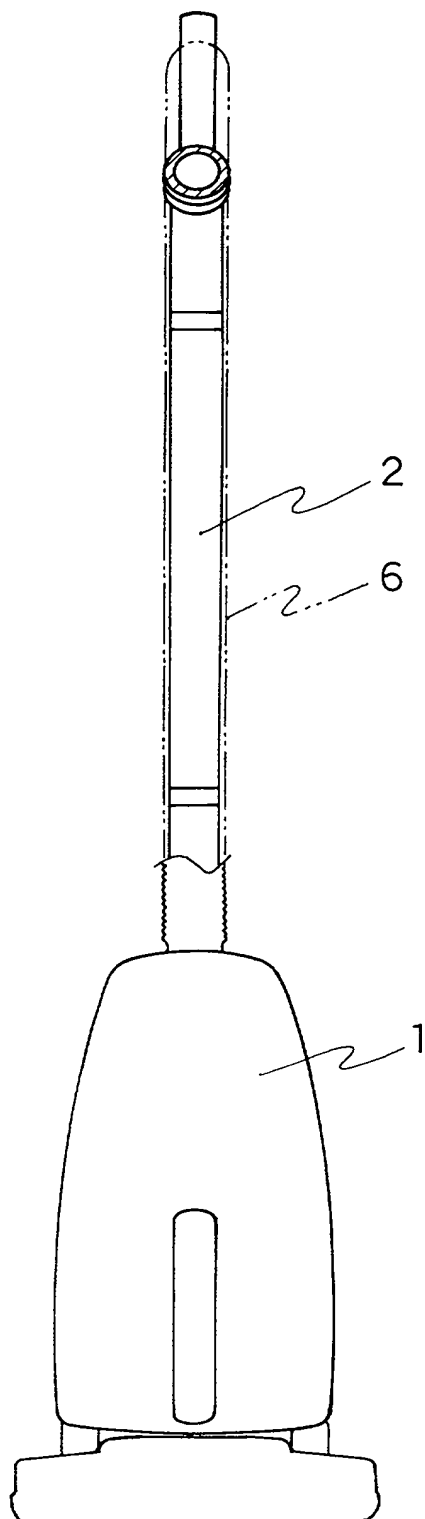


FIG. 18

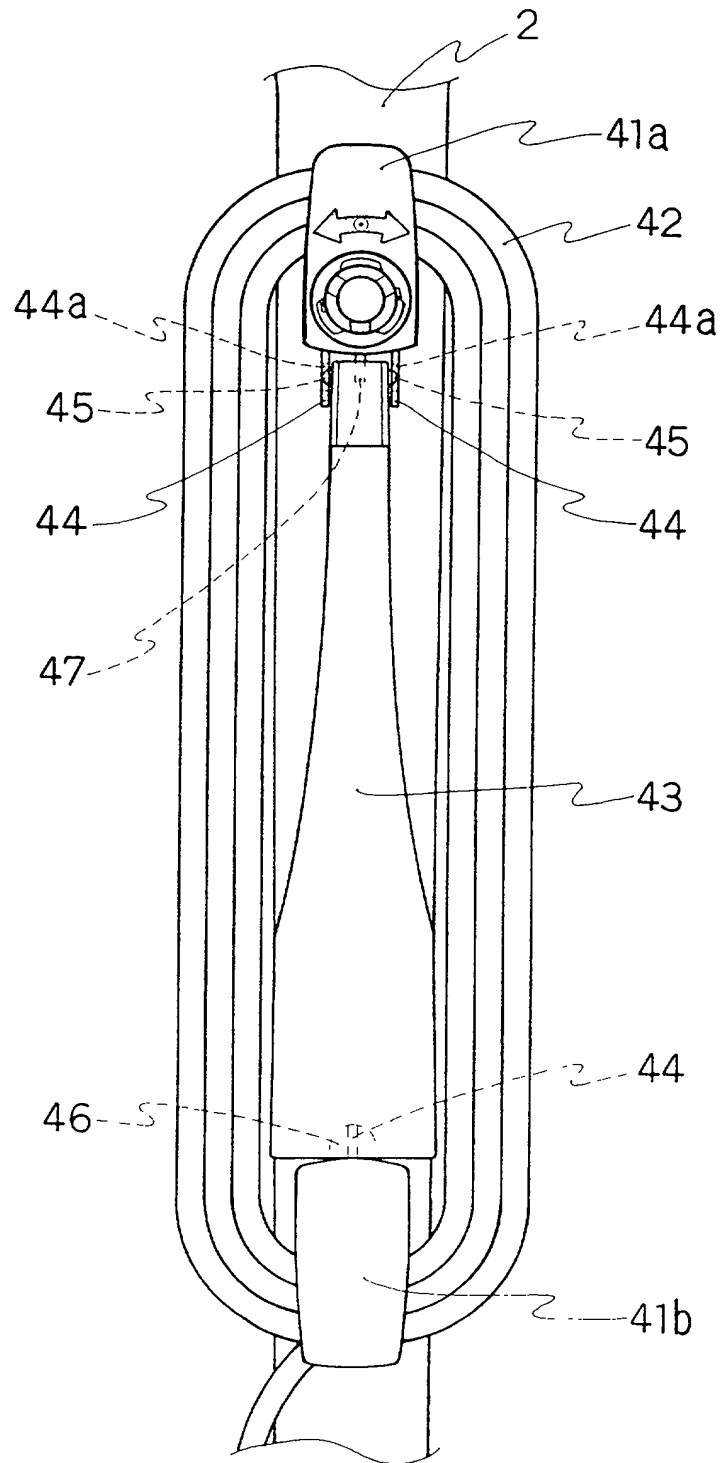


FIG. 19

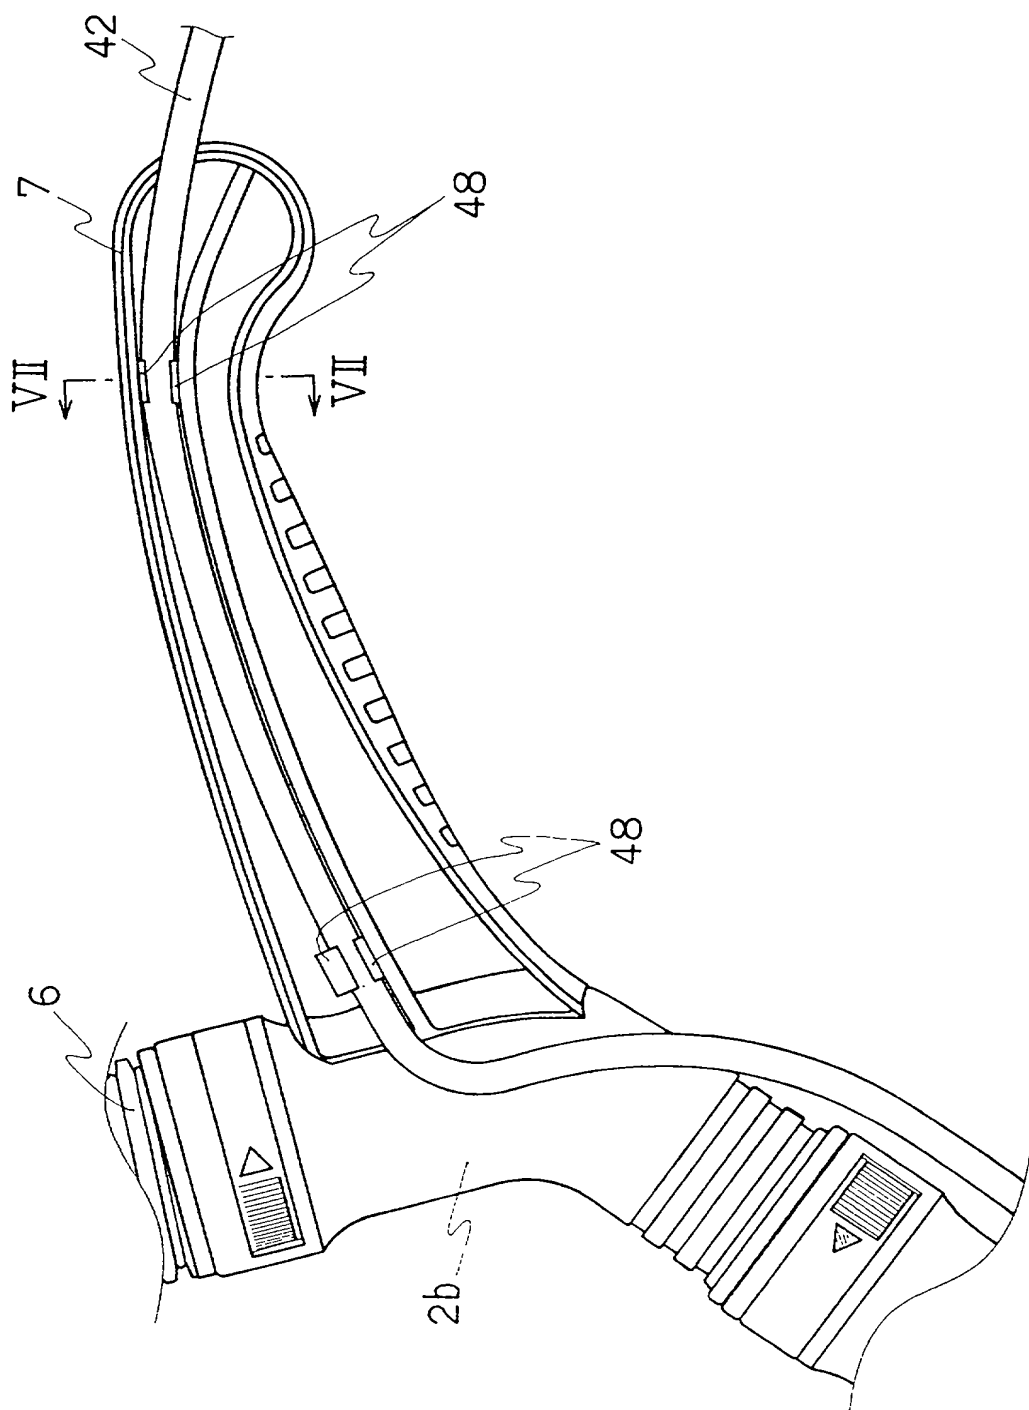




FIG. 20


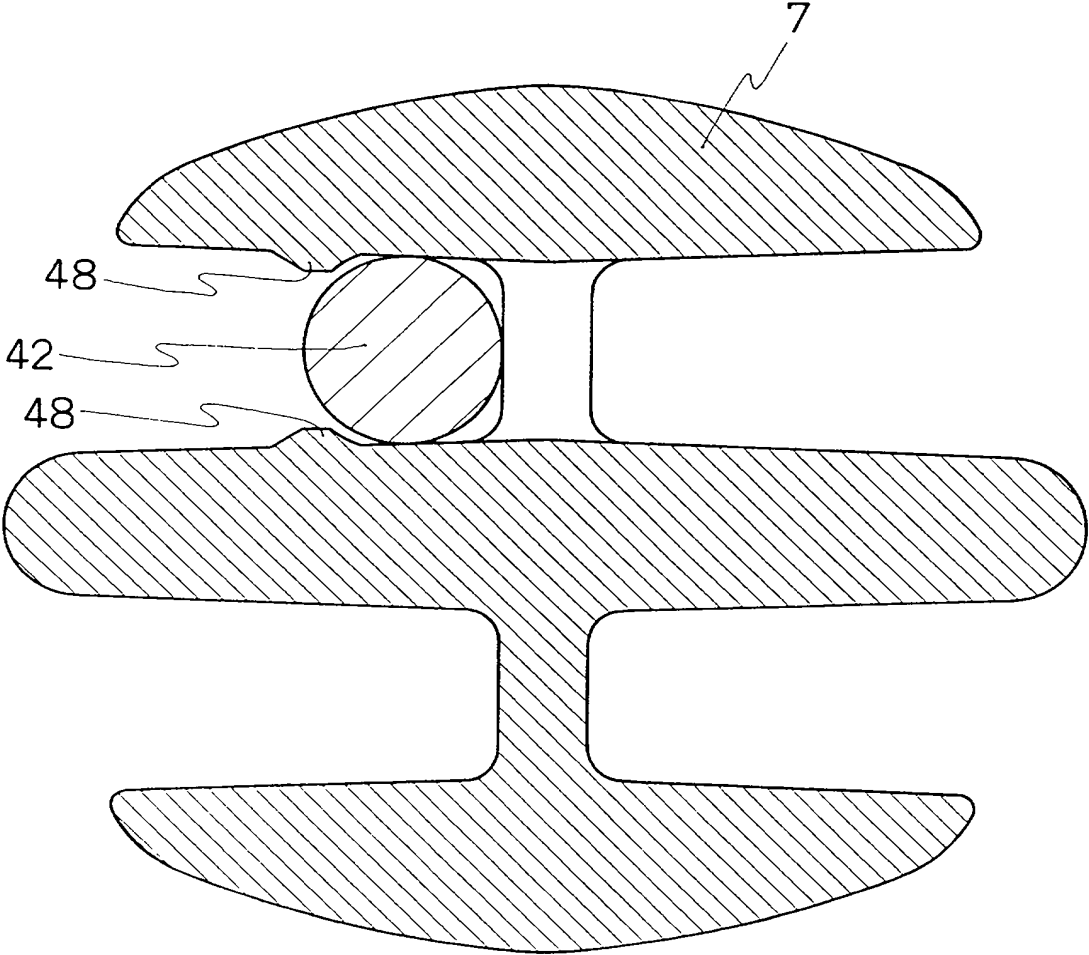


FIG. 21

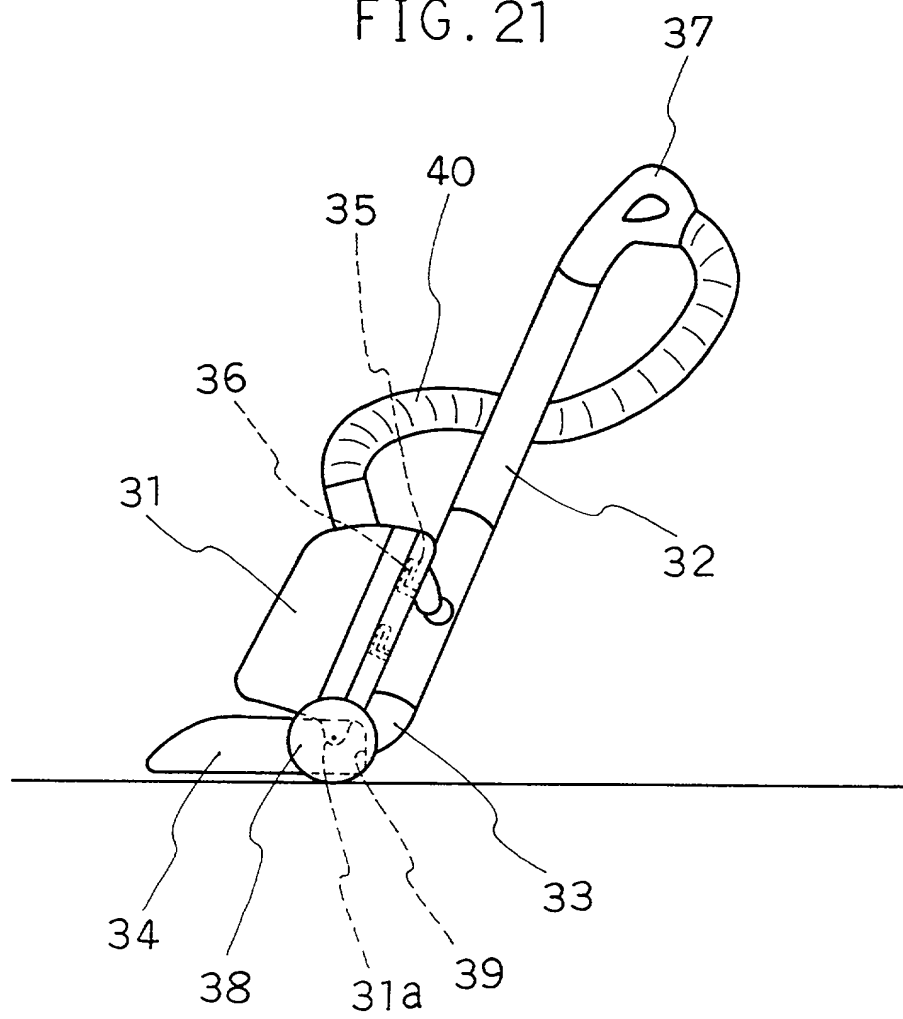

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

特許出願宣言書

Japanese Language Declaration

私は、下欄に氏名を記載した発  
明者として、以下のとおり宣言  
する：

私の住所、郵便の宛先および国  
籍は、下欄に氏名に続いて記載  
したとおりであり、

名称の発明に関し、請求の範囲  
に記載した特許を求める主題の  
本来の、最初にして唯一の発明  
者である(一人の氏名のみが下欄  
に記載されている場合)か、もし  
くは本来の、最初にして共同の  
発明者である(複数の氏名が下欄  
に記載されている場合)と信じ、

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

その明細所を  
(該当する方に印を付す)

☐ ここに添付する。

☐ \_\_\_\_\_ 日に 出願番号第  
第 \_\_\_\_\_ 号として提出し、  
\_\_\_\_\_ 日に補正した。  
(該当する場合)

私は、前記のとおり補正した請  
求の範囲を含む前記明細書の内  
容を検討し、理解したことを陳  
述する。

私は、連邦規則法典第37部第1章  
第56条(a)項に従い、本願の審査  
に所要の情報を開示すべき義務  
を有することを認める。

As a below-named inventor, I  
hereby declare that:

My residence, post office  
address and citizenship are as  
stated below next to my name,

I believe I am the original,  
first and sole inventor (if  
only one name is listed below)  
or an original, first and  
joint inventor (if plural  
names are listed below) of the  
subject matter which is  
claimed and for which a patent  
is sought on the invention  
entitled:

ELECTRIC VACUUM CLEANER  
\_\_\_\_\_  
\_\_\_\_\_

the specification of which  
(check one)

☒ is attached hereto

☐ was filed on \_\_\_\_\_  
as Appln. Ser. No. \_\_\_\_\_  
and was amended on \_\_\_\_\_  
(if applicable)

I hereby state that I have  
reviewed and understood the  
contents of the above-  
identified specification,  
including the claims, as  
amended by any amendments  
referred to above.

I acknowledge the duty to  
disclose information in  
accordance with Title 37, Code  
of Federal Regulations, §  
1.56(a).

[illegible]

June 23, 1997  
Filing date  
出願の年月日

<input checked="" type="checkbox"/>	<input type="checkbox"/>
Yes	No
あり	なし

166242/1997  
Number  
番号

Japan  
Country  
国名

June 23, 1997  
Filing date  
出願の年月日

<input checked="" type="checkbox"/>	<input type="checkbox"/>
Yes	No
あり	なし

Number  
番号

Country  
 国名

Filing date  
出願の年月日

☐ Yes  
あり

☐ No  
なし

Number  
番号

Country  
 国名

Filing date  
出願の年月日

☐ Yes  
あり

☐ No  
なし

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior of the prior application and the national or PCT International filing date of this application:

Appln. Ser. No.  
出願番号

Filing Date  
出願日

Status (patd., pend., abndnd.)  
現況(特許済み、係属中、放棄済み)

Appln. Ser. No.  
出願番号

Filing Date  
出願日

Status (patd., pend., abndnd.)  
現況(特許済み、係属中、放棄済み)

と実によつた1001の意の許こ  
も真の行第禁ら故の行  
にて情を第18部はか願るあ述を  
識る情を第18部はか願るあ述を  
知する情を第18部はか願るあ述を  
のがす情を第18部はか願るあ述を  
己述有る情を第18部はか願るあ述を  
自陳のろあ法典もまた述与こ上  
にた己こ偽罰金の、陳付う以言  
こつ自と実虚衆、るさ偽のてな、  
こ行、る真に合りれ科虚対をしを  
は、り、る真に合りれ科虚対をしを  
私はいあ信述故に場条魁刑に本有をた

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

委任状：私は、下記発明者と  
て、以下私の代理人を  
並び、本願の権利を  
を特許する。

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorneys to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

I hereby appoint John H. Mion, Reg. No. 18,879; Donald E. Zinn, Reg. No. 19,046; Thomas J. Macpeak, Reg. No. 19,292; Robert J. Seas, Jr., Reg. No. 21,092; Darryl Mexic, Reg. No. 23,063; Robert V. Sloan, Reg. No. 22,775; Peter D. Olexy, Reg. No. 24,513; J. Frank Osha, Reg. No. 24,625; Waddell A. Biggart, Reg. No. 24,861; Robert G. McMorrow, Reg. No. 19,093; Louis Gubinsky, Reg. No. 24,835; Neil B. Siegel, Reg. No. 25,200; David J. Cushing, Reg. No. 28,703; John R. Inge, Reg. No. 26,916; Joseph J. Ruch, Jr., Reg. No. 26,577; Sheldon I. Landsman, Reg. No. 25,430; Richard C. Turner, Reg. No. 29,710; Howard L. Bernstein, Reg. No. 25,665; Alan J. Kasper, Reg. No. 25,426; Kenneth J. Burchfiel, Reg. No. 31,333; Gordon Kit, Reg. No. 30,764; Susan J. Mack, Reg. No. 30,951; Frank L. Bernstein, Reg. No. 31,484; Mark Boland, Reg. No. 32,197; William H. Mandir, Reg. No. 32,156; Scott M. Daniels, Reg. No. 32,562; Brian W. Hannon, Reg. No. 32,778; Abraham J. Rosner, Reg. No. 33,276; Bruce E. Kramer, Reg. No. 33,725; Paul F. Neils, Reg. No. 33,102; and Brett S. Sylvester, Reg. No. 32,765, my attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and request that all correspondence about the application be addressed to SUGHRUE, MION, ZINN, MACPEAK & SEAS, 2100 Pennsylvania Avenue, N.W., Washington, D.C. 20037-3202.

Full name of sole or first inventor	唯一のまたは第一の発明者の氏名(ローマ字)	Kazuyoshi Yoshimi
Inventor's signature	同発明者の署名	Kazuyoshi Yoshimi
Residence	住所	Hikami-gun, Hyogo-ken, Japan
Post office address	郵便の宛先	276-2, Uegaki, Ichijima-cho, Hikami-gun, Hyogo-ken, Japan
	Citizenship	Japanese
	Date	June 4, 1998

Full name of second joint inventor (if any)  
第2の共同発明者の氏名(該当する場合)(ロ-マ字) Isao Yoneda  
Second Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_  
同第2発明者の署名 Isao Yoneda 日付 June 4, 1998  
Residence \_\_\_\_\_ Citizenship \_\_\_\_\_  
住所 Himeji-shi, Hyogo-ken, Japan 国籍 Japanese  
Post office address \_\_\_\_\_  
郵便の宛先 1150-21, Hoshiro, Himeji-shi, Hyogo-ken, Japan

Full name of third joint inventor (if any)  
第3の共同発明者の氏名(該当する場合)(ロ-マ字) Naoki Suetsugu  
Third Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_  
同第3発明者の署名 Naoki Suetsugu 日付 June 4, 1998  
Residence \_\_\_\_\_ Citizenship \_\_\_\_\_  
住所 Kasai-shi, Hyogo-ken, Japan 国籍 Japanese  
Post office address \_\_\_\_\_  
郵便の宛先 624, Furusaka, Hojo-cho, Kasai-shi, Hyogo-ken, Japan

Full name of fourth joint inventor (if any)  
第4の共同発明者の氏名(該当する場合)(ロ-マ字) \_\_\_\_\_  
Fourth Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_  
同第4発明者の署名 \_\_\_\_\_ 日付 \_\_\_\_\_  
Residence \_\_\_\_\_ Citizenship \_\_\_\_\_  
住所 \_\_\_\_\_ 国籍 \_\_\_\_\_  
Post office address \_\_\_\_\_  
郵便の宛先 \_\_\_\_\_

Full name of fifth joint inventor (if any)  
第5の共同発明者の氏名(該当する場合)(ロ-マ字) \_\_\_\_\_  
Fifth Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_  
同第5発明者の署名 \_\_\_\_\_ 日付 \_\_\_\_\_  
Residence \_\_\_\_\_ Citizenship \_\_\_\_\_  
住所 \_\_\_\_\_ 国籍 \_\_\_\_\_  
Post office address \_\_\_\_\_  
郵便の宛先 \_\_\_\_\_

Full name of sixth joint inventor (if any)  
第6の共同発明者の氏名(該当する場合)(ロ-マ字) \_\_\_\_\_  
Sixth Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_  
同第6発明者の署名 \_\_\_\_\_ 日付 \_\_\_\_\_  
Residence \_\_\_\_\_ Citizenship \_\_\_\_\_  
住所 \_\_\_\_\_ 国籍 \_\_\_\_\_  
Post office address \_\_\_\_\_  
郵便の宛先 \_\_\_\_\_